



MANHOLE COVERS DIRECT
All Purpose Manhole Design & Fabrication

PRODUCT CATALOGUE

WE MAKE
THEM **QUICK**

WE MAKE
THEM **CUSTOM**

WE MAKE
THEM **FIT** NEW OR
EXISTING
SPACES



MANHOLE COVERS DIRECT
All Purpose Manhole Design & Fabrication

WE MAKE
THEM **QUICK**

WE MAKE
THEM **CUSTOM**

WE MAKE
THEM **FIT** NEW OR
EXISTING
SPACES


Round Manholes

ROUND STEEL MANHOLES GRAVEL GUARD FRAME



INSTALLED VIEW

INTENDED FOR CONCRETE INSTALLATION

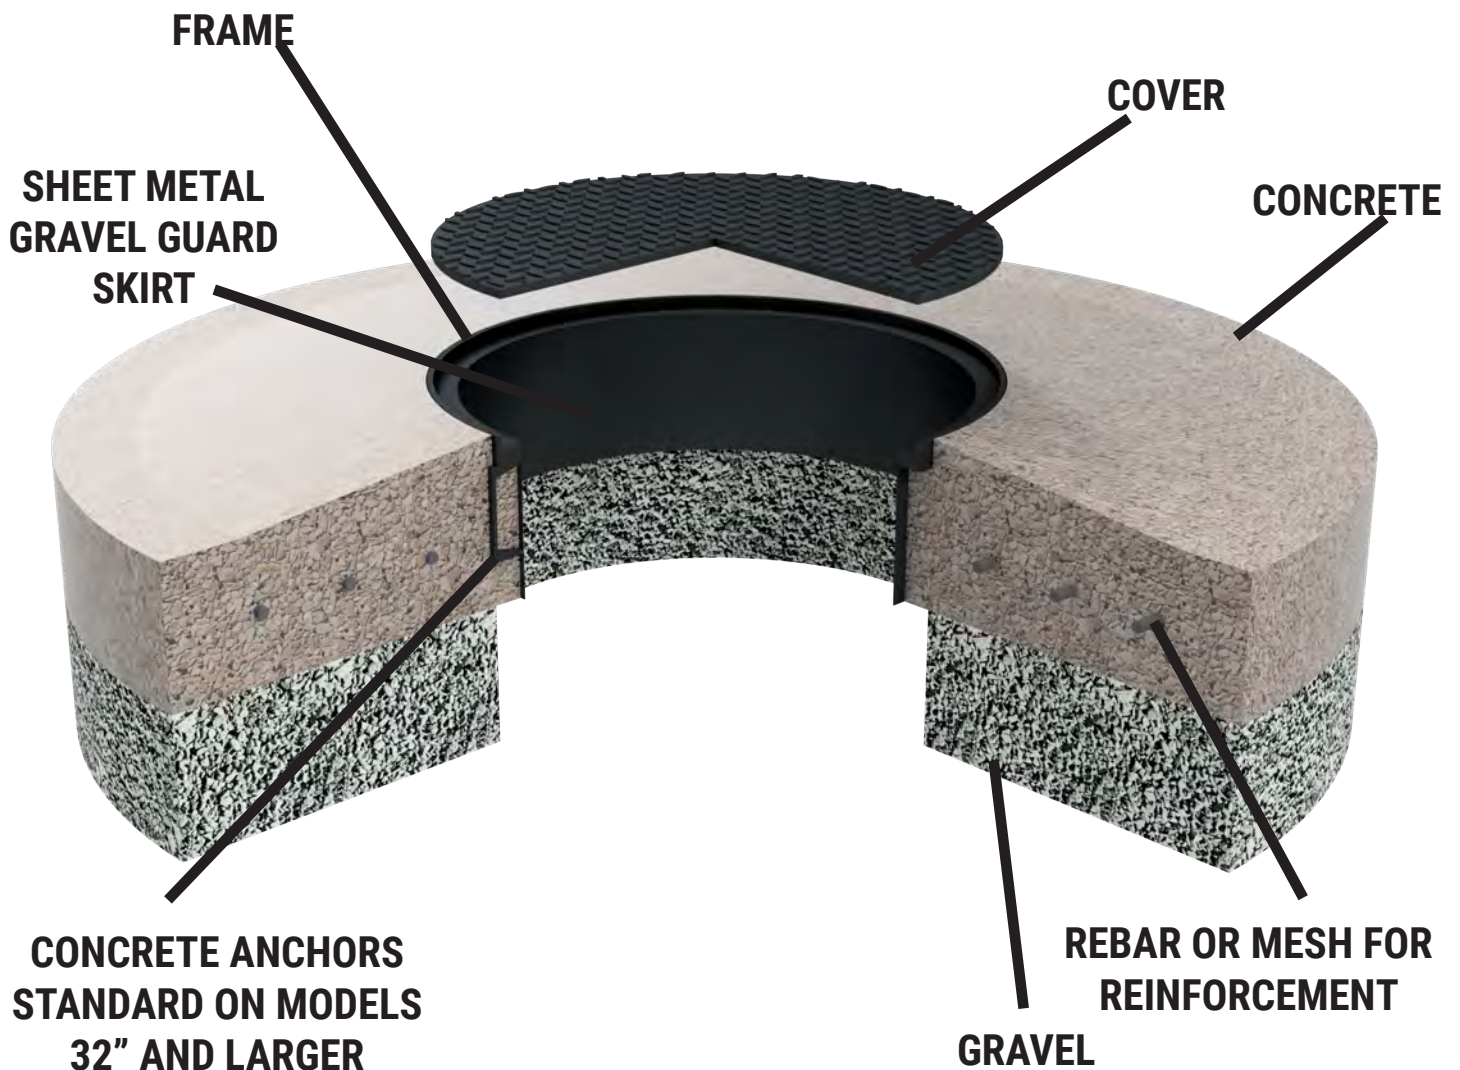


SMALL ROUND STEEL MANHOLES GRAVEL GUARD FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES DESIGNED TO BE INSTALLED IN CONCRETE APPLICATIONS. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY T FRAME AND 14 GAUGE SKIRT, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVERS


Lay In Style with 1/2" x 1" Pick Hole for Easy Removal

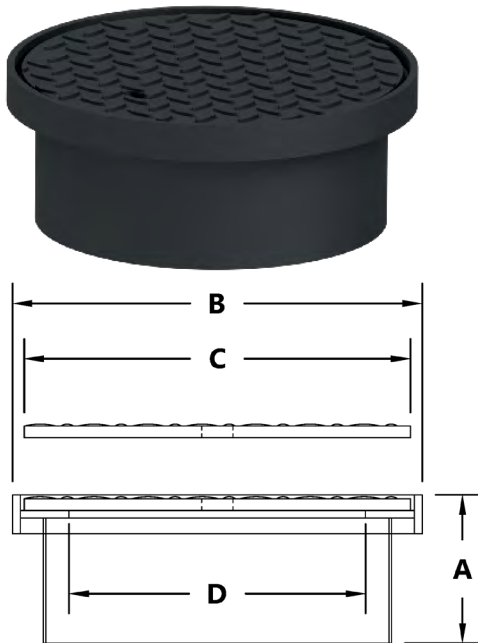

SIZE	MODEL	A	B	C	D
8"	R-8x4-STN	4-3/4"	9-3/16"	8-7/16"	5-3/4"
	R-8x6-STN	6-3/4"			
	R-8x8-STN	8-3/4"			
	R-8x12-STN	12-3/4"			
	R-8x18-STN	18-3/4"			
	R-8x24-STN	24-3/4"			
	R-8x36-STN	36-3/4"			
12"	R-12x4-STN	4-3/4"	13-1/8"	12-3/8"	9-1/2"
	R-12x6-STN	6-3/4"			
	R-12x8-STN	8-3/4"			
	R-12x12-STN	12-3/4"			
	R-12x18-STN	18-3/4"			
	R-12x24-STN	24-3/4"			
	R-12x36-STN	36-3/4"			
18"	R-18x4-STN	4-3/4"	18-3/4"	18"	15"
	R-18x6-STN	6-3/4"			
	R-18x8-STN	8-3/4"			
	R-18x12-STN	12-3/4"			
	R-18x18-STN	18-3/4"			
	R-18x24-STN	24-3/4"			
	R-18x36-STN	36-3/4"			

BOLT DOWN COVERS

Bolt Down Style with Gasket and Stainless Steel Hardware

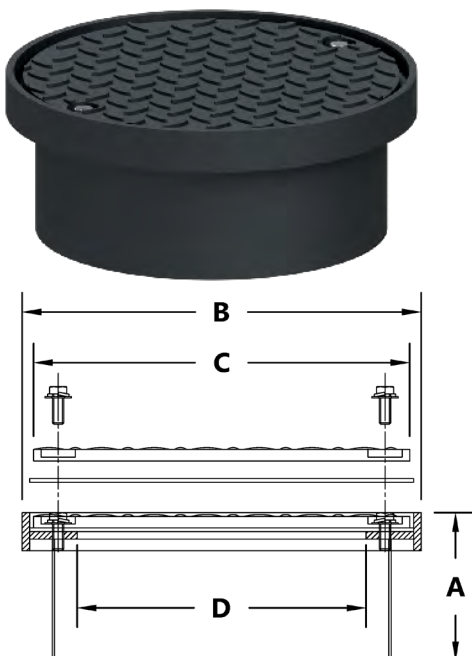

SIZE	MODEL	A	B	C	D
8"	R-8x4-BD	4-7/8"	9-3/16"	8-7/16"	5-3/4"
	R-8x6-BD	6-7/8"			
	R-8x8-BD	8-7/8"			
	R-8x12-BD	12-7/8"			
	R-8x18-BD	18-7/8"			
	R-8x24-BD	24-7/8"			
	R-8x36-BD	36-7/8"			
12"	R-12x4-BD	4-7/8"	13-1/8"	12-3/8"	9-1/2"
	R-12x6-BD	6-7/8"			
	R-12x8-BD	8-7/8"			
	R-12x12-BD	12-7/8"			
	R-12x18-BD	18-7/8"			
	R-12x24-BD	24-7/8"			
	R-12x36-BD	36-7/8"			
18"	R-18x4-BD	4-7/8"	18-3/4"	18"	15"
	R-18x6-BD	6-7/8"			
	R-18x8-BD	8-7/8"			
	R-18x12-BD	12-7/8"			
	R-18x18-BD	18-7/8"			
	R-18x24-BD	24-7/8"			
	R-18x36-BD	36-7/8"			



MEDIUM ROUND STEEL MANHOLES GRAVEL GUARD FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES DESIGNED TO BE INSTALLED IN CONCRETE APPLICATIONS. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY T FRAME AND 14 GAUGE SKIRT, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVERS


Lay In Style with 1/2" x 1" Pick Hole for Easy Removal

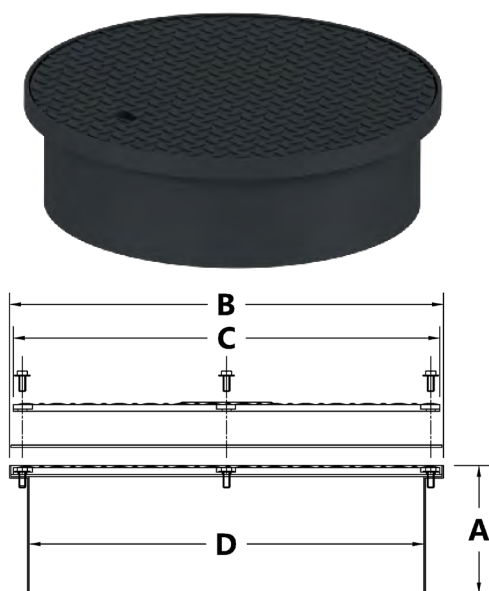

SIZE	MODEL	A	B	C	D
20"	R-20x4-STN	5"	20-1/2"	19-3/4	18
	R-20x6-STN	7"			
	R-20x8-STN	9"			
	R-20x12-STN	13"			
	R-20x18-STN	19"			
	R-20x24-STN	25"			
	R-20x36-STN	37"			
24"	R-24x4-STN	5"	24-1/2"	23-3/4	22
	R-24x6-STN	7"			
	R-24x8-STN	9"			
	R-24x12-STN	13"			
	R-24x18-STN	19"			
	R-24x24-STN	25"			
	R-24x36-STN	37"			
30"	R-30x4-STN	5"	30-1/2"	29-3/4	28
	R-30x6-STN	7"			
	R-30x8-STN	9"			
	R-30x12-STN	13"			
	R-30x18-STN	19"			
	R-30x24-STN	25"			
	R-30x36-STN	37"			

BOLT DOWN COVERS

Bolt Down Style with Gasket and Stainless Steel Hardware, Recessed Pick Eye Handle

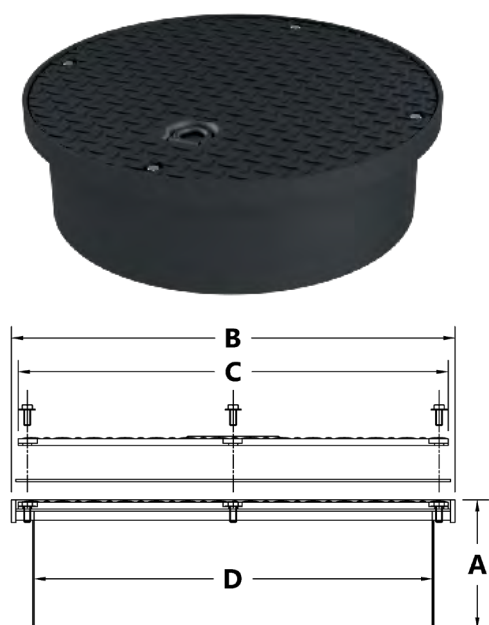

SIZE	MODEL	A	B	C	D
20"	R-20x4-BD	5-1/4"	20-1/2"	19-3/4	18
	R-20x6-BD	7-1/4"			
	R-20x8-BD	9-1/4"			
	R-20x12-BD	13-1/4"			
	R-20x18-BD	19-1/4"			
	R-20x24-BD	25-1/4"			
	R-20x36-BD	37-1/4"			
24"	R-24x4-BD	5-1/4"	24-1/2"	23-3/4	22
	R-24x6-BD	7-1/4"			
	R-24x8-BD	9-1/4"			
	R-24x12-BD	13-1/4"			
	R-24x18-BD	19-1/4"			
	R-24x24-BD	25-1/4"			
	R-24x36-BD	37-1/4"			
30"	R-30x4-BD	5-1/4"	30-1/2"	29-3/4	28
	R-30x6-BD	7-1/4"			
	R-30x8-BD	9-1/4"			
	R-30x12-BD	13-1/4"			
	R-30x18-BD	19-1/4"			
	R-30x24-BD	25-1/4"			
	R-30x36-BD	37-1/4"			


LARGE ROUND STEEL MANHOLES GRAVEL GUARD FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES DESIGNED TO BE INSTALLED IN CONCRETE APPLICATIONS. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY T FRAME AND 14 GAUGE SKIRT, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVERS


Lay In Style with Round Bar Handles, Concrete Anchors

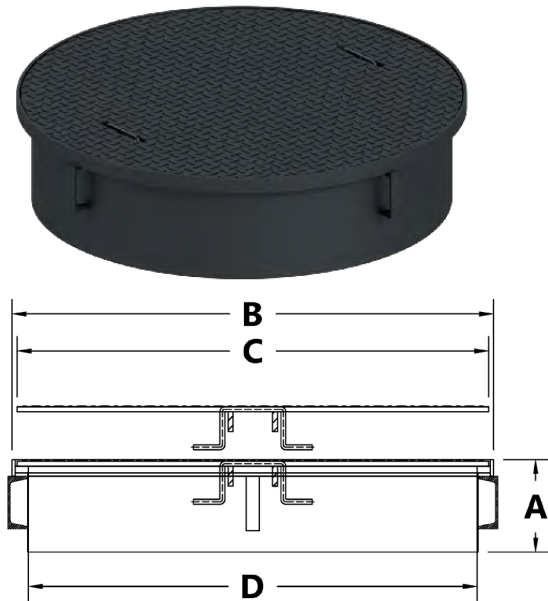

SIZE	MODEL	A	B	C	D
32"	R-32x4-STN	5"	32-1/2"	31-3/4"	30"
	R-32x6-STN	7"			
	R-32x8-STN	9"			
	R-32x12-STN	13"			
	R-32x18-STN	19"			
	R-32x24-STN	25"			
36"	R-32x36-STN	37"			
	R-36x4-STN	5"	36-1/2"	35-3/4"	34"
	R-36x6-STN	7"			
	R-36x8-STN	9"			
	R-36x12-STN	13"			
	R-36x18-STN	19"			
38"	R-36x24-STN	25"			
	R-36x36-STN	37"			
	R-38x4-STN	5"	38-1/2"	37-3/4"	36"
	R-38x6-STN	7"			
	R-38x8-STN	9"			
	R-38x12-STN	13"			
	R-38x18-STN	19"			
	R-38x24-STN	25"			
	R-38x36-STN	37"			

BOLT DOWN COVERS

Bolt Down Style with Gasket, Stainless Steel Hardware, Recessed Pick Eye Handles, Concrete Anchors

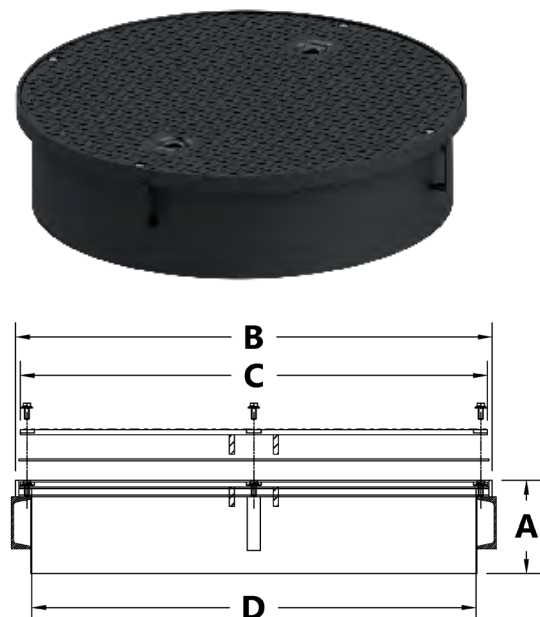

SIZE	MODEL	A	B	C	D
32"	R-32x4-BD	5-1/4"	32-1/2"	31-3/4"	30"
	R-32x6-BD	7-1/4"			
	R-32x8-BD	9-1/4"			
	R-32x12-BD	13-1/4"			
	R-32x18-BD	19-1/4"			
	R-32x24-BD	25-1/4"			
	R-32x36-BD	37-1/4"			
36"	R-36x4-BD	5-1/4"	36-1/2"	35-3/4"	34"
	R-36x6-BD	7-1/4"			
	R-36x8-BD	9-1/4"			
	R-36x12-BD	13-1/4"			
	R-36x18-BD	19-1/4"			
	R-36x24-BD	25-1/4"			
	R-36x36-BD	37-1/4"			
38"	R-38x4-BD	5-1/4"	38-1/2"	37-3/4"	36"
	R-38x6-BD	7-1/4"			
	R-38x8-BD	9-1/4"			
	R-38x12-BD	13-1/4"			
	R-38x18-BD	19-1/4"			
	R-38x24-BD	25-1/4"			
	R-38x36-BD	37-1/4"			


EXTRA LARGE ROUND STEEL MANHOLES GRAVEL GUARD FRAME



ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES DESIGNED TO BE INSTALLED IN CONCRETE APPLICATIONS. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY T FRAME AND 14 GAUGE SKIRT, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.

LAY IN COVERS


Lay In Style with Round Bar Handles, Concrete Anchors

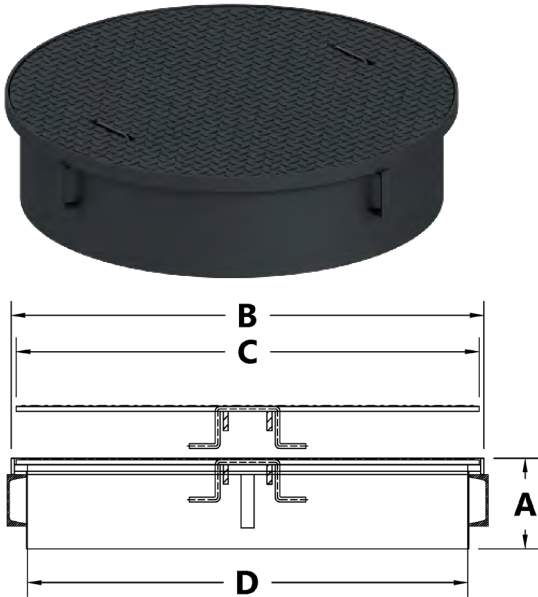

SIZE	MODEL	A	B	C	D
42"	R-42x4-STN	5"	42-1/2"	41-3/4"	40"
	R-42x6-STN	7"			
	R-42x8-STN	9"			
	R-42x12-STN	13"			
	R-42x18-STN	19"			
	R-42x24-STN	25"			
48"	R-42x36-STN	37"			
	R-48x4-STN	5"	48-1/2"	47-3/4"	46"
	R-48x6-STN	7"			
	R-48x8-STN	9"			
	R-48x12-STN	13"			
	R-48x18-STN	19"			
60"	R-48x24-STN	25"			
	R-48x36-STN	37"			
	R-60x4-STN	5"	60-1/2"	59-3/4"	58"
	R-60x6-STN	7"			
	R-60x8-STN	9"			
	R-60x12-STN	13"			
	R-60x18-STN	19"			
	R-60x24-STN	25"			
	R-60x36-STN	37"			

BOLT DOWN COVERS

Bolt Down Style with Gasket, Stainless Steel Hardware, Recessed Pick Eye Handles, Concrete Anchors

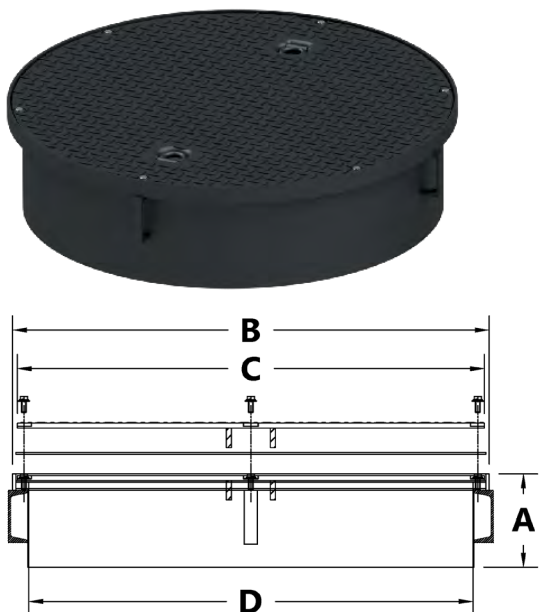


SIZE	MODEL	A	B	C	D
42"	R-42x4-BD	5-1/4"	42-1/2"	41-3/4"	40"
	R-42x6-BD	7-1/4"			
	R-42x8-BD	9-1/4"			
	R-42x12-BD	13-1/4"			
	R-42x18-BD	19-1/4"			
	R-42x24-BD	25-1/4"			
	R-42x36-BD	37-1/4"			
48"	R-48x4-BD	5-1/4"	48-1/2"	47-3/4"	46"
	R-48x6-BD	7-1/4"			
	R-48x8-BD	9-1/4"			
	R-48x12-BD	13-1/4"			
	R-48x18-BD	19-1/4"			
	R-48x24-BD	25-1/4"			
	R-48x36-BD	37-1/4"			
60"	R-60x4-BD	5-1/4"	60-1/2"	59-3/4"	58"
	R-60x6-BD	7-1/4"			
	R-60x8-BD	9-1/4"			
	R-60x12-BD	13-1/4"			
	R-60x18-BD	19-1/4"			
	R-60x24-BD	25-1/4"			
	R-60x36-BD	37-1/4"			

ROUND STEEL MANHOLES TOP FLANGE FRAME



INSTALLED VIEW

INTENDED FOR CONCRETE INSTALLATION

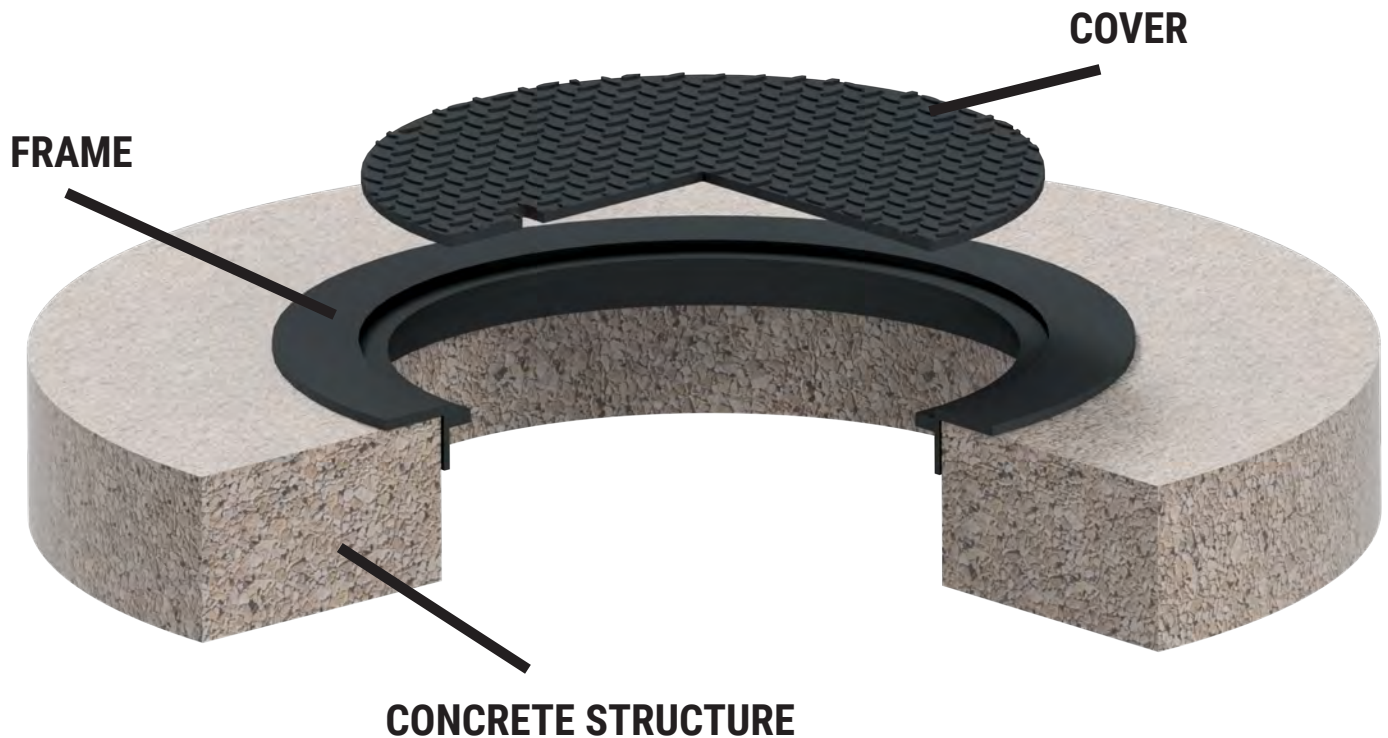


SMALL ROUND STEEL MANHOLES TOP FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES ARE INTENDED FOR CONCRETE INSTALLATION. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.




LAY IN COVER

Lay In Style with 1/2" x 1" Pick Hole for Easy Removal

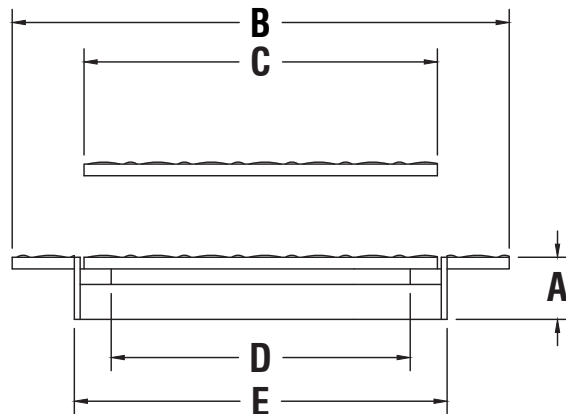

BOLT DOWN COVER

Bolt Down Style with Gasket, Stainless Steel Hardware

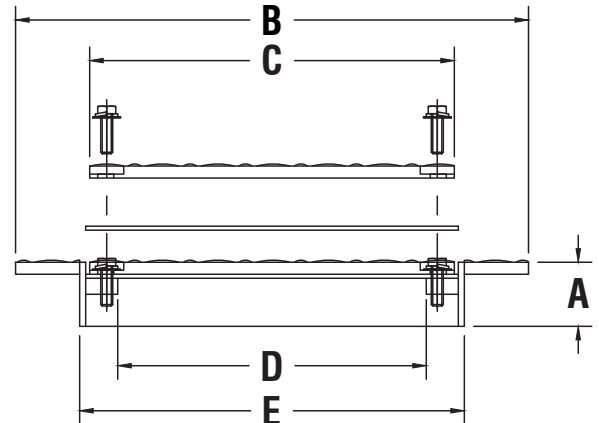

SIZE	LAY IN MODEL	BOLT DOWN MODEL	A	B	C	D	E
8"	R1-8x2-STN	R1-8x2-BD	2"	12"	8-7/16"	5-3/4"	9-1/16"
	R1-8x3-STN	R1-8x3-BD	3"				
	R1-8x4-STN	R1-8x4-BD	4"				
12"	R1-12x2-STN	R1-12x2-BD	2"	17"	12-3/8"	9-1/2"	13"
	R1-12x3-STN	R1-12x3-BD	3"				
	R1-12x4-STN	R1-12x4-BD	4"				
18"	R1-18x2-STN	R1-18x2-BD	2"	22-3/4"	18"	15"	18-5/8"
	R1-18x3-STN	R1-18x3-BD	3"				
	R1-18x4-STN	R1-18x4-BD	4"				


MEDIUM ROUND STEEL MANHOLES TOP FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES ARE INTENDED FOR CONCRETE INSTALLATION. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.




LAY IN COVER

Lay In Style with 1/2" x 1" Pick Hole for Easy Removal

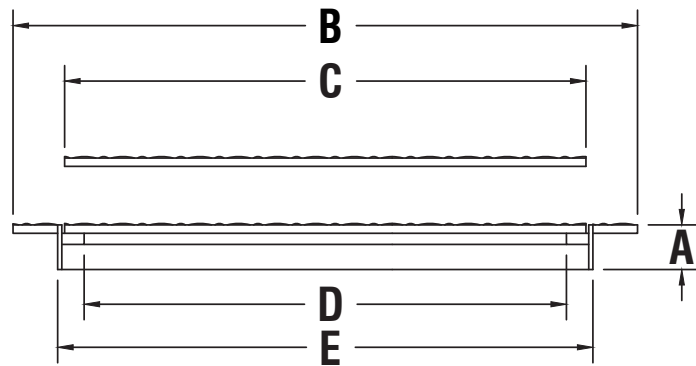

BOLT DOWN COVER

Bolt Down Style with Gasket, Stainless Steel Hardware, Recessed Pick Eye Handle

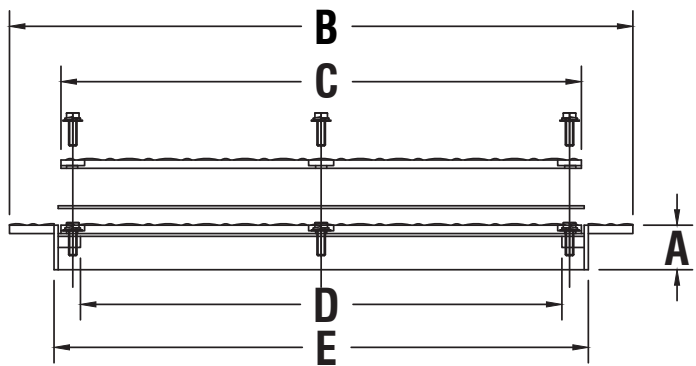

SIZE	LAY IN MODEL	BOLT DOWN MODEL	A	B	C	D	E
20"	R1-20x2-STN	R1-20x2-BD	2"	23-3/4"	19-3/4"	18"	20-3/8"
	R1-20x3-STN	R1-20x3-BD	3"				
	R1-20x4-STN	R1-20x4-BD	4"				
24"	R1-24x2-STN	R1-24x2-BD	2"	28-3/8"	23-3/4"	22"	24-3/8"
	R1-24x3-STN	R1-24x3-BD	3"				
	R1-24x4-STN	R1-24x4-BD	4"				
30"	R1-30x2-STN	R1-30x2-BD	2"	34-3/8"	29-3/4"	28"	30-3/8"
	R1-30x3-STN	R1-30x3-BD	3"				
	R1-30x4-STN	R1-30x4-BD	4"				


LARGE ROUND STEEL MANHOLES TOP FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES ARE INTENDED FOR CONCRETE INSTALLATION. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.




LAY IN COVER

Lay In Style with Round Bar Handles

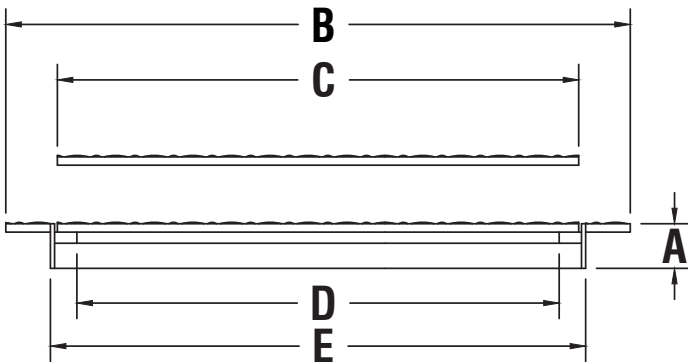

BOLT DOWN COVER

Bolt Down Style with Gasket, Stainless Steel Hardware, Recessed Pick Eye Handles

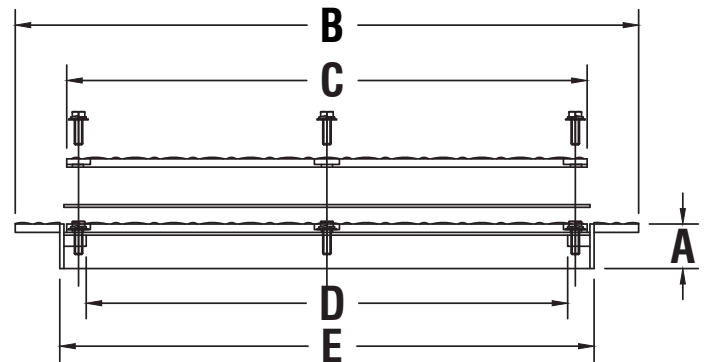


SIZE	LAY IN MODEL	BOLT DOWN MODEL	A	B	C	D	E
32"	R1-32x2-STN	R1-32x2-BD	2"	35-3/4"	31-3/4"	30"	32-3/8"
	R1-32x3-STN	R1-32x3-BD	3"				
	R1-32x4-STN	R1-32x4-BD	4"				
36"	R1-36x2-STN	R1-36x2-BD	2"	41-3/8"	35-3/4"	34"	36-3/8"
	R1-36x3-STN	R1-36x3-BD	3"				
	R1-36x4-STN	R1-36x4-BD	4"				
38"	R1-38x2-STN	R1-38x2-BD	2"	43-3/8"	37-3/4"	36"	38-3/8"
	R1-38x3-STN	R1-38x3-BD	3"				
	R1-38x4-STN	R1-38x4-BD	4"				

ROUND STEEL MANHOLES BASE FLANGE FRAME



INSTALLED VIEW

INTENDED FOR CONCRETE, ASPHALT, GRASS OR DIRT INSTALLATION

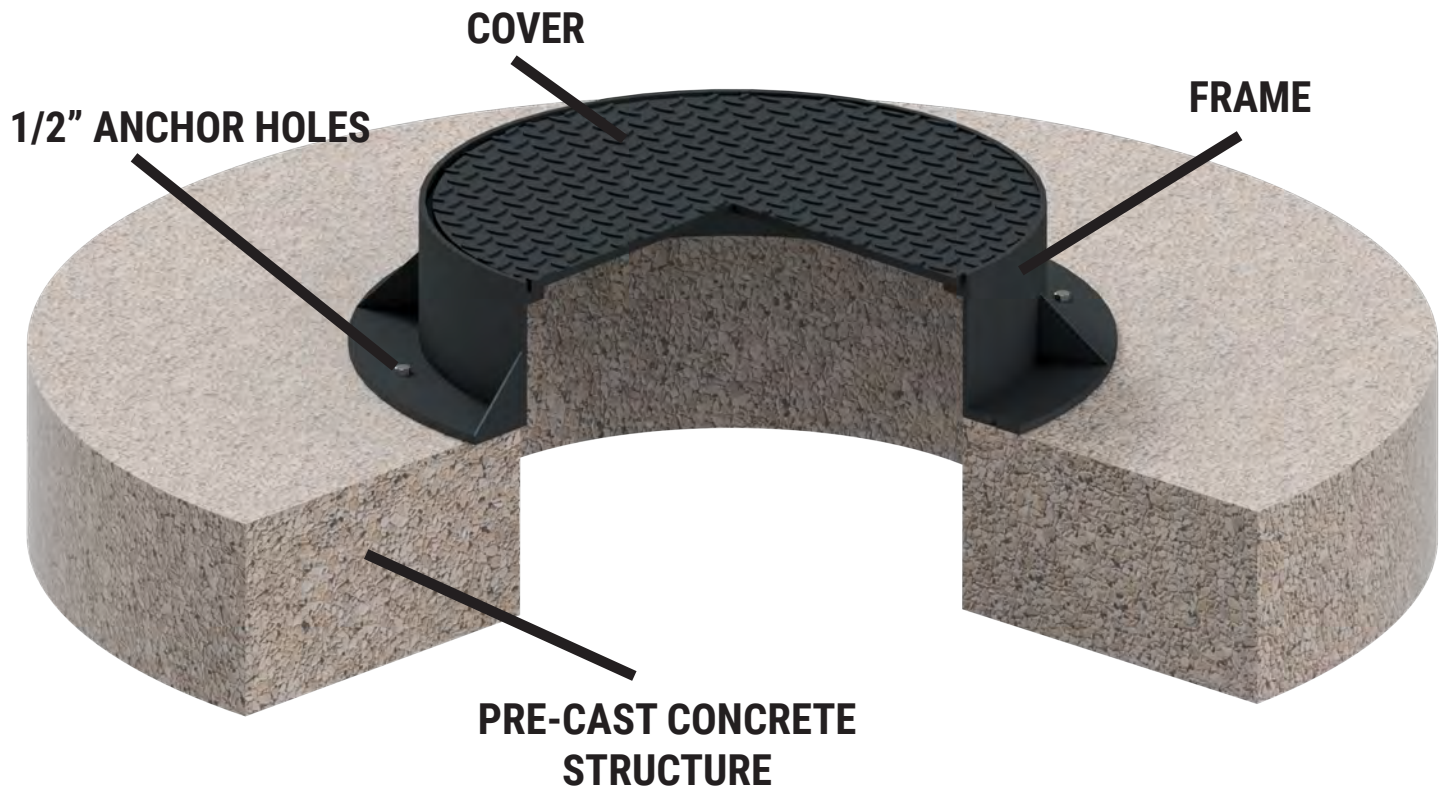

MEDIUM ROUND STEEL MANHOLES BASE FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES ARE INTENDED FOR CONCRETE, ASPHALT, GRASS OR DIRT INSTALLATION. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVER

Lay In Style with 1/2" x 1" Pick Hole for Easy Removal




BOLT DOWN COVER

Bolt Down Style with Gasket, Stainless Steel Hardware, Recessed Pick Eye Handle




SIZE	LAY IN MODEL	BOLT DOWN MODEL	A	B	C	D
20"	R2-20x2-STN	R2-20x2-BD	2"	23-3/4"	19-3/4"	18"
	R2-20x3-STN	R2-20x3-BD	3"			
	R2-20x4-STN	R2-20x4-BD	4"			
	R2-20x5-STN	R2-20x5-BD	5"			
	R2-20x6-STN	R2-20x6-BD	6"			
	R2-20x8-STN	R2-20x8-BD	8"			
	R2-20x10-STN	R2-20x10-BD	10"			
	R2-20x12-STN	R2-20x12-BD	12"			
24"	R2-24x2-STN	R2-24x2-BD	2"	28-3/8"	23-3/4"	22"
	R2-24x3-STN	R2-24x3-BD	3"			
	R2-24x4-STN	R2-24x4-BD	4"			
	R2-24x5-STN	R2-24x5-BD	5"			
	R2-24x6-STN	R2-24x6-BD	6"			
	R2-24x8-STN	R2-24x8-BD	8"			
	R2-24x10-STN	R2-24x10-BD	10"			
	R2-24x12-STN	R2-24x12-BD	12"			
30"	R2-30x2-STN	R2-30x2-BD	2"	34-3/8"	29-3/4"	28"
	R2-30x3-STN	R2-30x3-BD	3"			
	R2-30x4-STN	R2-30x4-BD	4"			
	R2-30x5-STN	R2-30x5-BD	5"			
	R2-30x6-STN	R2-30x6-BD	6"			
	R2-30x8-STN	R2-30x8-BD	8"			
	R2-30x10-STN	R2-30x10-BD	10"			
	R2-30x12-STN	R2-30x12-BD	12"			

LAY IN COVER

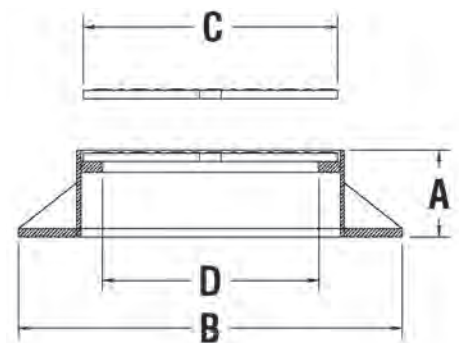

BOLT DOWN COVER

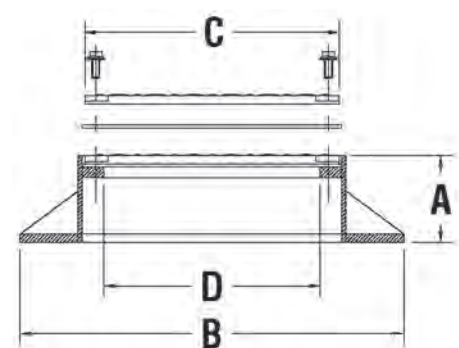

SMALL ROUND STEEL MANHOLES BASE FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES ARE INTENDED FOR CONCRETE, ASPHALT, GRASS OR DIRT INSTALLATION. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVER

Lay In Style with 1/2" x 1" Pick Hole for Easy Removal




BOLT DOWN COVER

Bolt Down Style with Gasket, Stainless Steel Hardware




SIZE	LAY IN MODEL	BOLT DOWN MODEL	A	B	C	D
8"	R2-8x2-STN	R2-8x2-BD	2"	12"	8-7/16"	5-3/4"
	R2-8x3-STN	R2-8x3-BD	3"			
	R2-8x4-STN	R2-8x4-BD	4"			
	R2-8x5-STN	R2-8x5-BD	5"			
	R2-8x6-STN	R2-8x6-BD	6"			
	R2-8x8-STN	R2-8x8-BD	8"			
	R2-8x10-STN	R2-8x10-BD	10"			
	R2-8x12-STN	R2-8x12-BD	12"			
12"	R2-12x2-STN	R2-12x2-BD	2"	17"	12-3/8"	9-1/2"
	R2-12x3-STN	R2-12x3-BD	3"			
	R2-12x4-STN	R2-12x4-BD	4"			
	R2-12x5-STN	R2-12x5-BD	5"			
	R2-12x6-STN	R2-12x6-BD	6"			
	R2-12x8-STN	R2-12x8-BD	8"			
	R2-12x10-STN	R2-12x10-BD	10"			
	R2-12x12-STN	R2-12x12-BD	12"			
18"	R2-18x2-STN	R2-18x2-BD	2"	22-3/4"	18"	15"
	R2-18x3-STN	R2-18x3-BD	3"			
	R2-18x4-STN	R2-18x4-BD	4"			
	R2-18x5-STN	R2-18x5-BD	5"			
	R2-18x6-STN	R2-18x6-BD	6"			
	R2-18x8-STN	R2-18x8-BD	8"			
	R2-18x10-STN	R2-18x10-BD	10"			
	R2-18x12-STN	R2-18x12-BD	12"			

LAY IN COVER

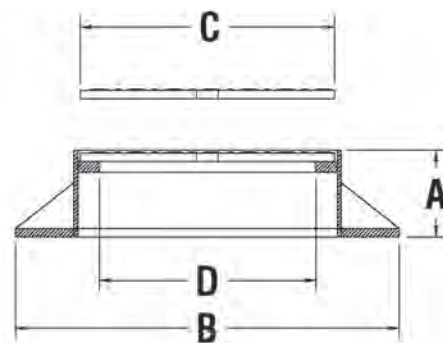

BOLT DOWN COVER

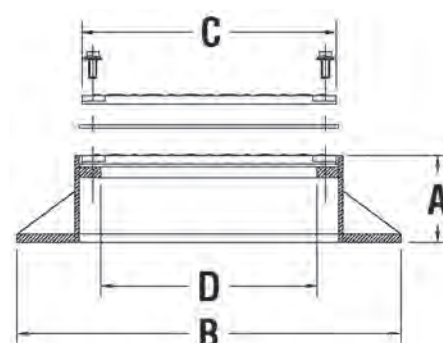

LARGE ROUND STEEL MANHOLES BASE FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES ARE INTENDED FOR CONCRETE, ASPHALT, GRASS OR DIRT INSTALLATION. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVER

Lay In Style with Round Bar Handles




BOLT DOWN COVER

Bolt Down Style with Gasket, Stainless Steel Hardware, Recessed Pick Eye Handles




SIZE	LAY IN MODEL	BOLT DOWN MODEL	A	B	C	D
32"	R2-32x2-STN	R2-32x2-BD	2"	35-3/4"	31-3/4"	30"
	R2-32x3-STN	R2-32x3-BD	3"			
	R2-32x4-STN	R2-32x4-BD	4"			
	R2-32x5-STN	R2-32x5-BD	5"			
	R2-32x6-STN	R2-32x6-BD	6"			
	R2-32x8-STN	R2-32x8-BD	8"			
	R2-32x10-STN	R2-32x10-BD	10"			
	R2-32x12-STN	R2-32x12-BD	12"			
36"	R2-36x2-STN	R2-36x2-BD	2"	41-3/8"	35-3/4"	34"
	R2-36x3-STN	R2-36x3-BD	3"			
	R2-36x4-STN	R2-36x4-BD	4"			
	R2-36x5-STN	R2-36x5-BD	5"			
	R2-36x6-STN	R2-36x6-BD	6"			
	R2-36x8-STN	R2-36x8-BD	8"			
	R2-36x10-STN	R2-36x10-BD	10"			
	R2-36x12-STN	R2-36x12-BD	12"			
38"	R2-38x2-STN	R2-38x2-BD	2"	43-3/8"	37-3/4"	36"
	R2-38x3-STN	R2-38x3-BD	3"			
	R2-38x4-STN	R2-38x4-BD	4"			
	R2-38x5-STN	R2-38x5-BD	5"			
	R2-38x6-STN	R2-38x6-BD	6"			
	R2-38x8-STN	R2-38x8-BD	8"			
	R2-38x10-STN	R2-38x10-BD	10"			
	R2-38x12-STN	R2-38x12-BD	12"			

LAY IN COVER

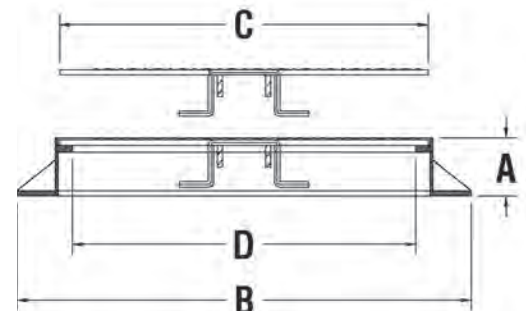

BOLT DOWN COVER

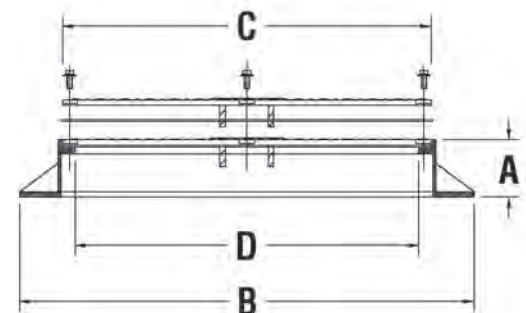

STEEL REPLACEMENT COVERS ROUND

MEDIUM DUTY ASTM-A36 CARBON STEEL REPLACEMENT COVERS ARE ADA COMPLIANT WITH NON SKID SURFACE. IDEAL FOR GENERAL, LOW SPEED, LOW VOLUME TRAFFIC APPLICATIONS SUCH AS PARKING LOTS, GAS STATIONS, ETC. NOT FOR HIGHWAY USE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. PAINTED BLACK FINISH. MADE IN THE USA.



MEDIUM DUTY



Choose from sizes to fit our standard manholes, or request a quote to accommodate your dimension and edge thickness. Every cover is custom made to your specification, and we look forward to helping you find a solution that works!

SIZE	MODEL	DIAMETER	THICKNESS	(1) 1/2" X 1" PICK HOLE	(2) ROUND BAR HANDLES
8"	MD-8.375X.375	8.375"	3/8"	✓	
12"	MD-12.375X.375	12.375"		✓	
18"	MD-17.875X.375	17.875"		✓	
20"	MD-19.75X.375	19.75"		✓	
24"	MD-23.75X.375	23.75"		✓	
30"	MD-29.75X.375	29.75"		✓	
32"	MD-31.75X.375	31.75"			✓
38"	MD-37.75X.375	37.75"	1/2"		✓
42"	MD-41.75X.5	41.75"			✓
48"	MD-47.75X.5	47.75"			✓



MANHOLE COVERS DIRECT
All Purpose Manhole Design & Fabrication

WE MAKE
THEM **QUICK**

WE MAKE
THEM **CUSTOM**

WE MAKE
THEM **FIT** NEW OR
EXISTING
SPACES


Square Manholes

SQUARE STEEL MANHOLES GRAVEL GUARD FRAME



INSTALLED VIEW

INTENDED FOR CONCRETE INSTALLATION

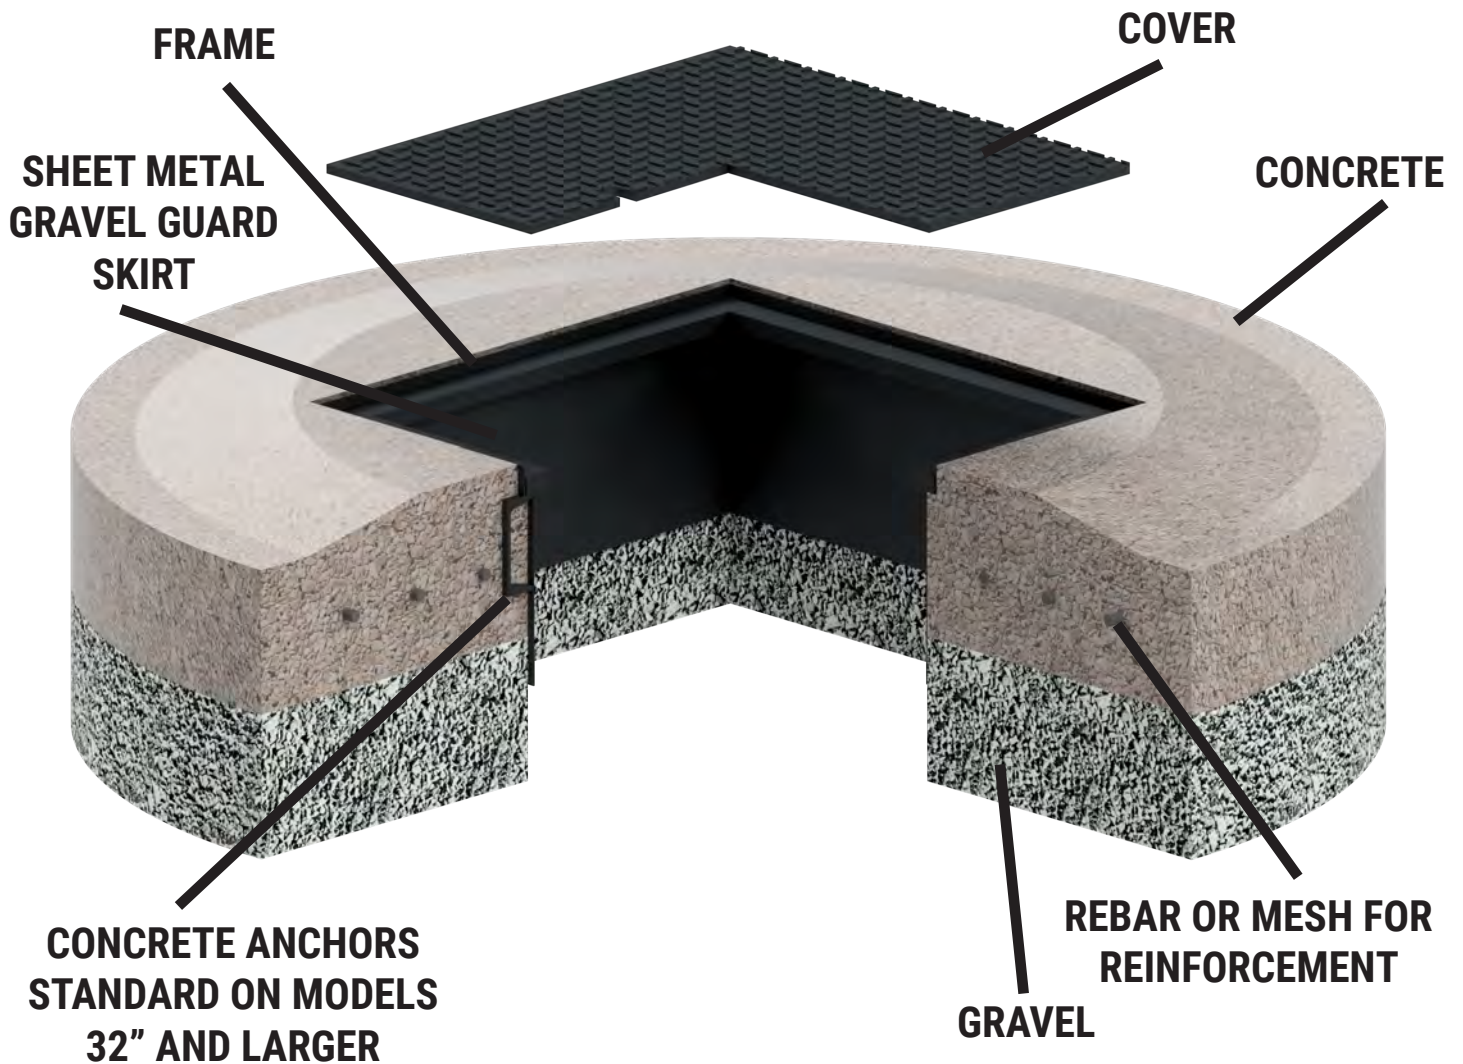


SMALL SQUARE STEEL MANHOLES

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES DESIGNED TO BE INSTALLED IN CONCRETE APPLICATIONS. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY 14 GAUGE FRAME AND SKIRT, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVERS


Lay In Style Cover with 1/2" x 1" Pick Hole for Easy Removal

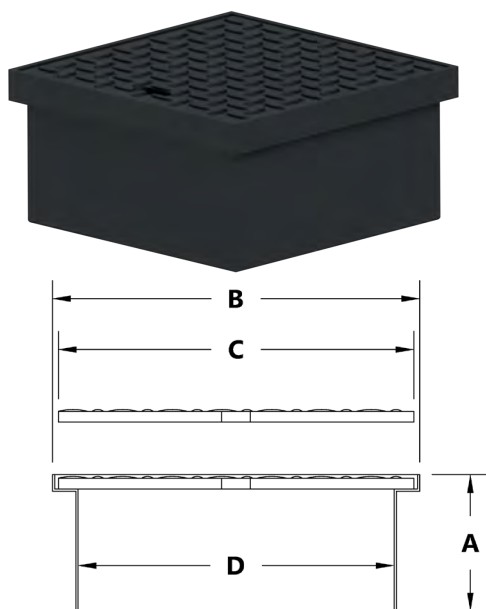

SIZE	MODEL	A	B	C	D
8"	S-8x4-STN	4"	8"	7-5/8"	6-1/4"
	S-8x6-STN	6"			
	S-8x8-STN	8"			
	S-8x12-STN	12"			
	S-8x18-STN	18"			
	S-8x24-STN	24"			
12"	S-8x36-STN	36"	12"	11-5/8"	10-1/4"
	S-12x4-STN	4"			
	S-12x6-STN	6"			
	S-12x8-STN	8"			
	S-12x12-STN	12"			
	S-12x18-STN	18"			
18"	S-12x24-STN	24"			
	S-12x36-STN	36"			
	S-18x4-STN	4"	18"	17-5/8"	16-1/4"
	S-18x6-STN	6"			
	S-18x8-STN	8"			
	S-18x12-STN	12"			
	S-18x18-STN	18"			
	S-18x24-STN	24"			
	S-18x36-STN	36"			

BOLT DOWN COVERS

Bolt Down Style Cover with Gasket and Stainless Steel Hardware

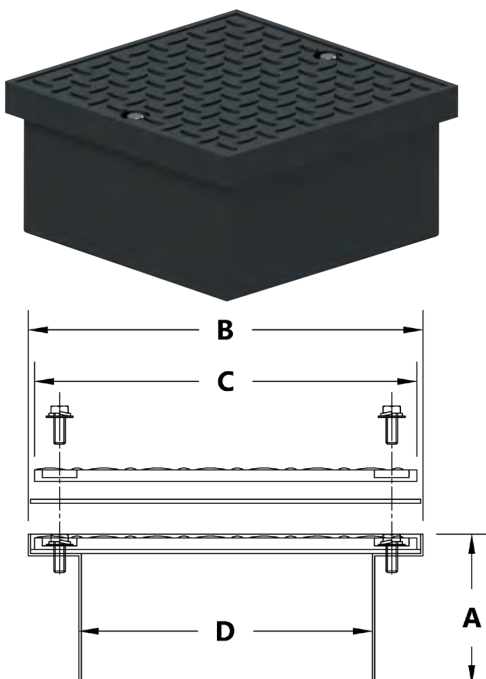

SIZE	MODEL	A	B	C	D
8"	S-8x4-BD	4"	8"	7-1/2"	5"
	S-8x6-BD	6"			
	S-8x8-BD	8"			
	S-8x12-BD	12"			
	S-8x18-BD	18"			
	S-8x24-STN	24"			
12"	S-8x36-STN	36"	12"	11-1/2"	9"
	S-12x4-BD	4"			
	S-12x6-BD	6"			
	S-12x8-BD	8"			
	S-12x12-BD	12"			
	S-12x18-BD	18"			
18"	S-12x24-BD	24"			
	S-12x36-STN	36"			
	S-18x4-BD	4"	18"	17-1/2"	15"
	S-18x6-BD	6"			
	S-18x8-BD	8"			
	S-18x12-BD	12"			
	S-18x18-BD	18"			
	S-18x24-STN	24"			
	S-18x36-STN	36"			


MEDIUM SQUARE STEEL MANHOLES

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES DESIGNED TO BE INSTALLED IN CONCRETE APPLICATIONS. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY 14 GAUGE FRAME AND SKIRT, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVERS


Lay In Style Cover with 1/2" x 1" Pick Hole for Easy Removal

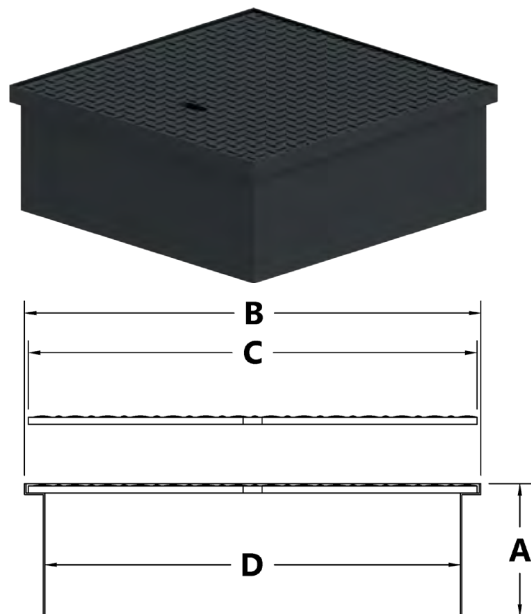

SIZE	MODEL	A	B	C	D
20"	S-20x4-STN	4"	20"	19-5/8"	18-1/4"
	S-20x6-STN	6"			
	S-20x8-STN	8"			
	S-20x12-STN	12"			
	S-20x18-STN	18"			
	S-20x24-STN	24"			
24"	S-20x36-STN	36"	24"	23-5/8"	22-1/4"
	S-24x4-STN	4"			
	S-24x6-STN	6"			
	S-24x8-STN	8"			
	S-24x12-STN	12"			
	S-24x18-STN	18"			
30"	S-24x24-STN	24"			
	S-24x36-STN	36"			
	S-30x4-STN	4"	30"	29-5/8"	28-1/4"
	S-30x6-STN	6"			
	S-30x8-STN	8"			
	S-30x12-STN	12"			
	S-30x18-STN	18"			
	S-30x24-STN	24"			
	S-30x36-STN	36"			

BOLT DOWN COVERS

Bolt Down Style with Gasket and Stainless Steel Hardware, Recessed Pick Eye Handle

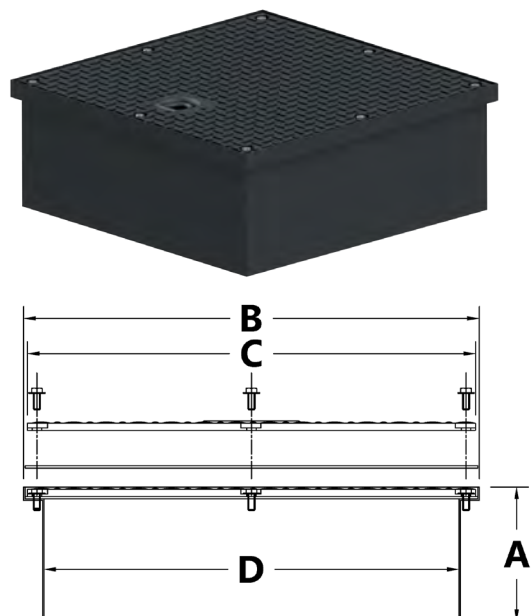

SIZE	MODEL	A	B	C	D
20"	S-20x4-BD	4"	20"	19-1/2"	17"
	S-20x6-BD	6"			
	S-20x8-BD	8"			
	S-20x12-BD	12"			
	S-20x18-BD	18"			
	S-20x24-BD	24"			
24"	S-20x36-BD	36"	24"	23-1/2"	21"
	S-24x4-BD	4"			
	S-24x6-BD	6"			
	S-24x8-BD	8"			
	S-24x12-BD	12"			
	S-24x18-BD	18"			
30"	S-24x24-BD	24"			
	S-24x36-BD	36"			
	S-30x4-BD	4"	30"	29-1/2"	27"
	S-30x6-BD	6"			
	S-30x8-BD	8"			
	S-30x12-BD	12"			
	S-30x18-BD	18"			
	S-30x24-BD	24"			
	S-30x36-BD	36"			


LARGE SQUARE STEEL MANHOLES

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES DESIGNED TO BE INSTALLED IN CONCRETE APPLICATIONS. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY 11 GAUGE FRAME AND SKIRT, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVERS



Lay In Style with Round Bar Handles, Concrete Anchors

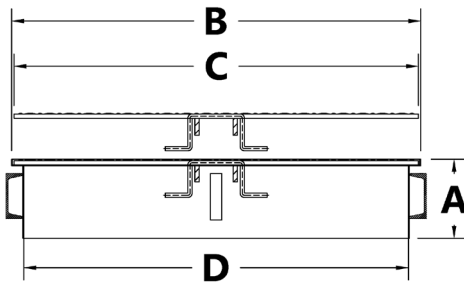

SIZE	MODEL	A	B	C	D
32"	S-32x4-STN	4"	32"	31-1/2"	29"
	S-32x6-STN	6"			
	S-32x8-STN	8"			
	S-32x12-STN	12"			
	S-32x18-STN	18"			
	S-32x24-STN	24"			
36"	S-32x36-STN	36"			
	S-36x4-STN	4"	36"	35-1/2"	33"
	S-36x6-STN	6"			
	S-36x8-STN	8"			
	S-36x12-STN	12"			
	S-36x18-STN	18"			
38"	S-36x24-STN	24"			
	S-36x36-STN	36"			
	S-38x4-STN	4"	38"	37-1/2"	35"
	S-38x6-STN	6"			
	S-38x8-STN	8"			
	S-38x12-STN	12"			
	S-38x18-STN	18"			
	S-38x24-STN	24"			
	S-38x36-STN	36"			

BOLT DOWN COVERS

Bolt Down Style with Gasket, Stainless Steel Hardware, Recessed Pick Eye Handles, Concrete Anchors

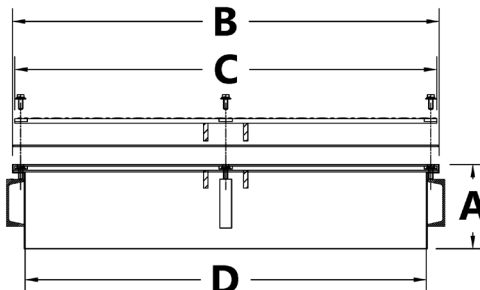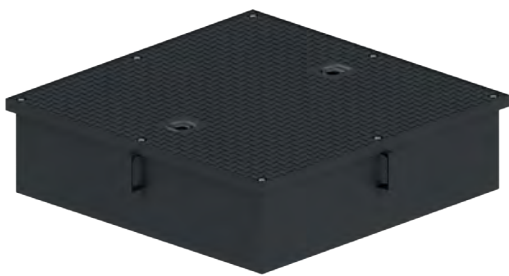

SIZE	MODEL	A	B	C	D
32"	S-32x4-BD	4"	32"	31-1/2"	29"
	S-32x6-BD	6"			
	S-32x8-BD	8"			
	S-32x12-BD	12"			
	S-32x18-BD	18"			
	S-32x24-BD	24"			
36"	S-32x36-BD	36"			
	S-36x4-BD	4"	36"	35-1/2"	33"
	S-36x6-BD	6"			
	S-36x8-BD	8"			
	S-36x12-BD	12"			
	S-36x18-BD	18"			
38"	S-36x24-BD	24"			
	S-36x36-BD	36"			
	S-38x4-BD	4"	38"	37-1/2"	35"
	S-38x6-BD	6"			
	S-38x8-BD	8"			
	S-38x12-BD	12"			
	S-38x18-BD	18"			
	S-38x24-BD	24"			
	S-38x36-BD	36"			


XL SQUARE STEEL MANHOLES

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES DESIGNED TO BE INSTALLED IN CONCRETE APPLICATIONS. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY 11 GAUGE FRAME AND SKIRT, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVERS


Lay In Style with Round Bar Handles, Concrete Anchors

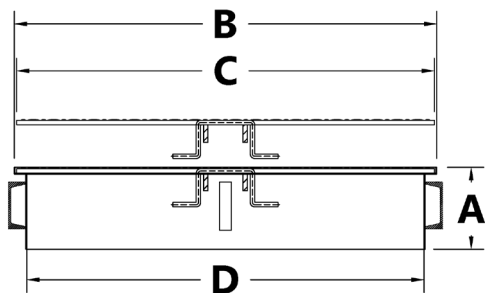

SIZE	MODEL	A	B	C	D
42"	S-42x4-STN	4"	42"	41-1/2"	39"
	S-42x6-STN	6"			
	S-42x8-STN	8"			
	S-42x12-STN	12"			
	S-42x18-STN	18"			
	S-42x24-STN	24"			
48"	S-42x36-STN	36"			
	S-48x4-STN	4"	48"	47-1/2"	45"
	S-48x6-STN	6"			
	S-48x8-STN	8"			
	S-48x12-STN	12"			
	S-48x18-STN	18"			
60"	S-48x24-STN	24"			
	S-48x36-STN	36"			
	S-60x4-STN	4"	60"	59-1/2"	57"
	S-60x6-STN	6"			
	S-60x8-STN	8"			
	S-60x12-STN	12"			
	S-60x18-STN	18"			
	S-60x24-STN	24"			
	S-60x36-STN	36"			

BOLT DOWN COVERS

Bolt Down Style with Gasket, Stainless Steel Hardware, Recessed Pick Eye Handles, Concrete Anchors

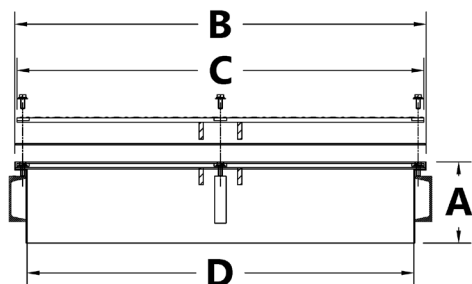


SIZE	MODEL	A	B	C	D
42"	S-42x4-BD	4"	42"	41-1/2"	39"
	S-42x6-BD	6"			
	S-42x8-BD	8"			
	S-42x12-BD	12"			
	S-42x18-BD	18"			
	S-42x24-BD	24"			
48"	S-42x36-BD	36"			
	S-48x4-BD	4"	48"	47-1/2"	45"
	S-48x6-BD	6"			
	S-48x8-BD	8"			
	S-48x12-BD	12"			
	S-48x18-BD	18"			
60"	S-48x24-BD	24"			
	S-48x36-BD	36"			
	S-60x4-BD	4"	60"	59-1/2"	57"
	S-60x6-BD	6"			
	S-60x8-BD	8"			
	S-60x12-BD	12"			
	S-60x18-BD	18"			
	S-60x24-BD	24"			
	S-60x36-BD	36"			

SQUARE STEEL MANHOLES BASE FLANGE FRAME



INSTALLED VIEW

INTENDED FOR CONCRETE, ASPHALT, GRASS OR DIRT INSTALLATION

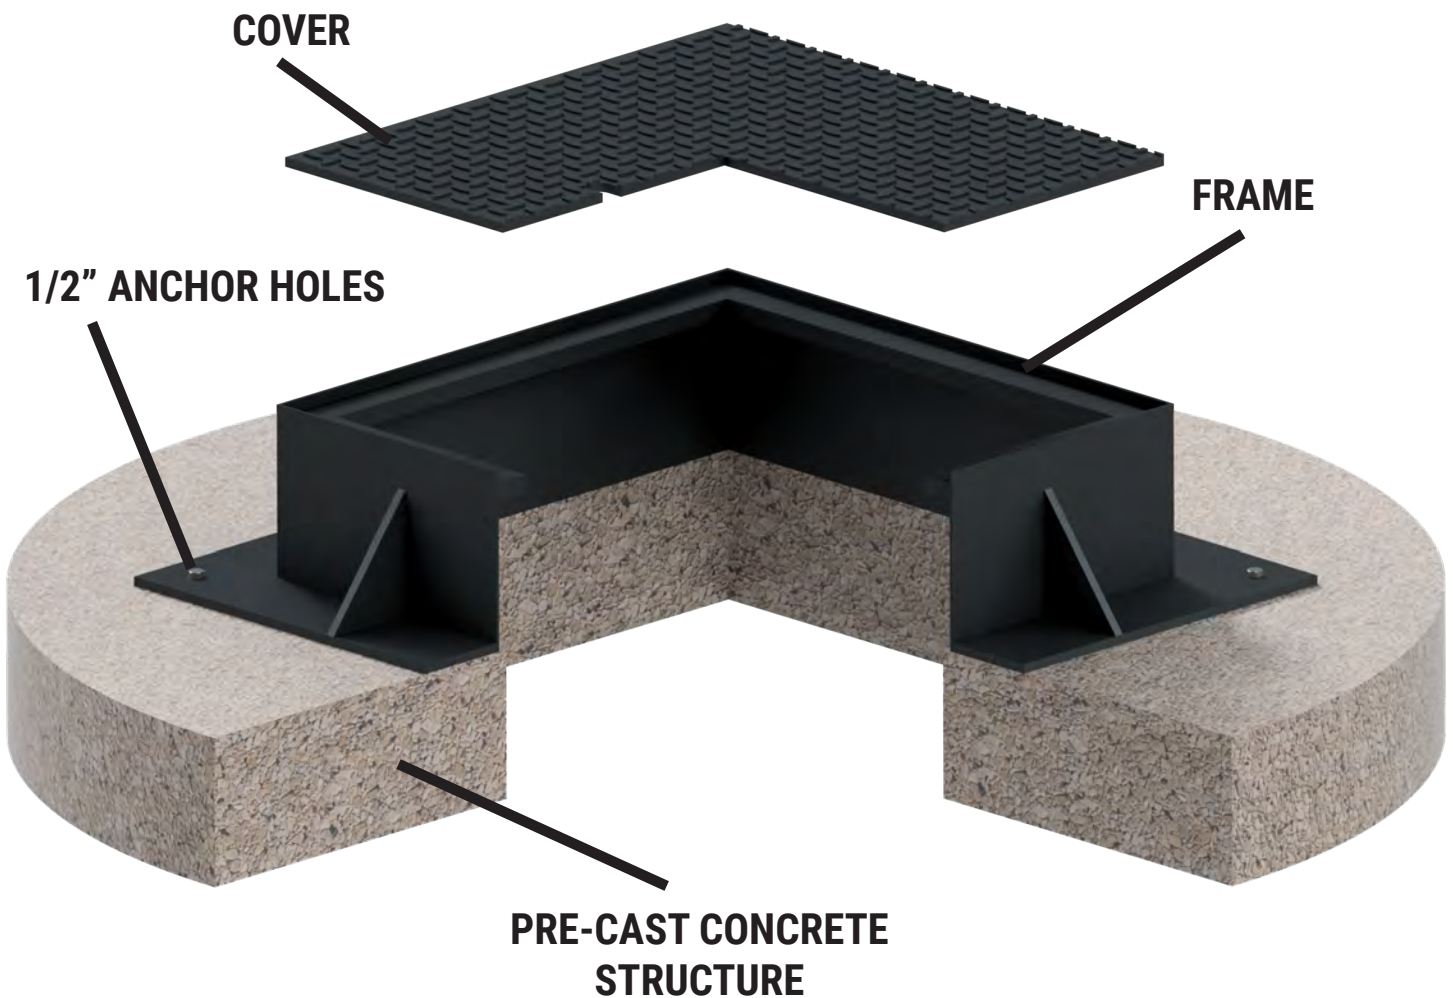

SMALL SQUARE STEEL MANHOLES BASE FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES ARE INTENDED FOR CONCRETE, ASPHALT, GRASS OR DIRT INSTALLATION. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVER

Lay In Style with 1/2" x 1" Pick Hole for Easy Removal




BOLT DOWN COVER

Bolt Down Style with Gasket, Stainless Steel Hardware




SIZE	LAY IN MODEL	BOLT DOWN MODEL	A	B	C	D
8"	S2-8x2-STN	S2-8x2-BD	2"	12"	8-3/8"	4-3/4"
	S2-8x3-STN	S2-8x3-BD	3"			
	S2-8x4-STN	S2-8x4-BD	4"			
	S2-8x5-STN	S2-8x5-BD	5"			
	S2-8x6-STN	S2-8x6-BD	6"			
	S2-8x8-STN	S2-8x8-BD	8"			
	S2-8x10-STN	S2-8x10-BD	10"			
	S2-8x12-STN	S2-8x12-BD	12"			
12"	S2-12x2-STN	S2-12x2-BD	2"	17"	12-3/8"	8-1/2"
	S2-12x3-STN	S2-12x3-BD	3"			
	S2-12x4-STN	S2-12x4-BD	4"			
	S2-12x5-STN	S2-12x5-BD	5"			
	S2-12x6-STN	S2-12x6-BD	6"			
	S2-12x8-STN	S2-12x8-BD	8"			
	S2-12x10-STN	S2-12x10-BD	10"			
	S2-12x12-STN	S2-12x12-BD	12"			
18"	S2-18x2-STN	S2-18x2-BD	2"	22-3/4"	18"	14"
	S2-18x3-STN	S2-18x3-BD	3"			
	S2-18x4-STN	S2-18x4-BD	4"			
	S2-18x5-STN	S2-18x5-BD	5"			
	S2-18x6-STN	S2-18x6-BD	6"			
	S2-18x8-STN	S2-18x8-BD	8"			
	S2-18x10-STN	S2-18x10-BD	10"			
	S2-18x12-STN	S2-18x12-BD	12"			

LAY IN COVER

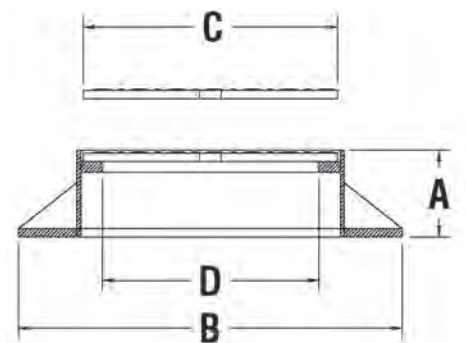

BOLT DOWN COVER

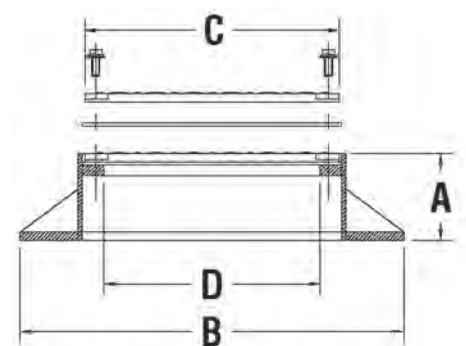

MEDIUM SQUARE STEEL MANHOLES BASE FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES ARE INTENDED FOR CONCRETE, ASPHALT, GRASS OR DIRT INSTALLATION. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVER

Lay In Style with 1/2" x 1" Pick Hole for Easy Removal


BOLT DOWN COVER

Bolt Down Style with Gasket, Stainless Steel Hardware, Recessed Pick Eye Handle




SIZE	LAY IN MODEL	BOLT DOWN MODEL	A	B	C	D
20"	S2-20x2-STN	S2-20x2-BD	2"	23-3/4"	19-3/4"	17"
	S2-20x3-STN	S2-20x3-BD	3"			
	S2-20x4-STN	S2-20x4-BD	4"			
	S2-20x5-STN	S2-20x5-BD	5"			
	S2-20x6-STN	S2-20x6-BD	6"			
	S2-20x8-STN	S2-20x8-BD	8"			
	S2-20x10-STN	S2-20x10-BD	10"			
	S2-20x12-STN	S2-20x12-BD	12"			
24"	S2-24x2-STN	S2-24x2-BD	2"	28-3/8"	23-3/4"	21"
	S2-24x3-STN	S2-24x3-BD	3"			
	S2-24x4-STN	S2-24x4-BD	4"			
	S2-24x5-STN	S2-24x5-BD	5"			
	S2-24x6-STN	S2-24x6-BD	6"			
	S2-24x8-STN	S2-24x8-BD	8"			
	S2-24x10-STN	S2-24x10-BD	10"			
	S2-24x12-STN	S2-24x12-BD	12"			
30"	S2-30x2-STN	S2-30x2-BD	2"	34-3/8"	29-3/4"	27"
	S2-30x3-STN	S2-30x3-BD	3"			
	S2-30x4-STN	S2-30x4-BD	4"			
	S2-30x5-STN	S2-30x5-BD	5"			
	S2-30x6-STN	S2-30x6-BD	6"			
	S2-30x8-STN	S2-30x8-BD	8"			
	S2-30x10-STN	S2-30x10-BD	10"			
	S2-30x12-STN	S2-30x12-BD	12"			

LAY IN COVER

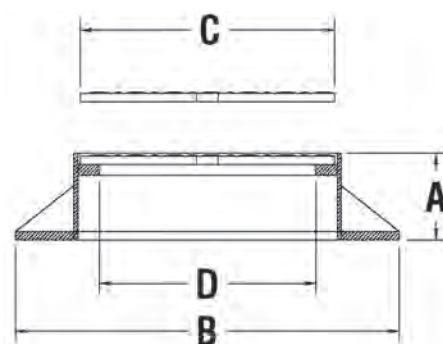

BOLT DOWN COVER

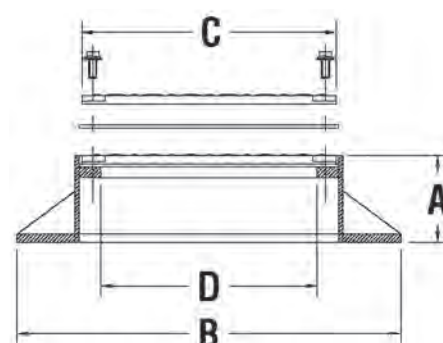

LARGE SQUARE STEEL MANHOLES BASE FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL ACCESS MANHOLES ARE INTENDED FOR CONCRETE, ASPHALT, GRASS OR DIRT INSTALLATION. ADA COMPLIANT DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVER

Lay In Style with Round Bar Handles




BOLT DOWN COVER

Bolt Down Style with Gasket, Stainless Steel Hardware, Recessed Pick Eye Handles




SIZE	LAY IN MODEL	BOLT DOWN MODEL	A	B	C	D
32"	S2-32x2-STN	S2-32x2-BD	2"	35-3/4"	31-3/4"	29"
	S2-32x3-STN	S2-32x3-BD	3"			
	S2-32x4-STN	S2-32x4-BD	4"			
	S2-32x5-STN	S2-32x5-BD	5"			
	S2-32x6-STN	S2-32x6-BD	6"			
	S2-32x8-STN	S2-32x8-BD	8"			
	S2-32x10-STN	S2-32x10-BD	10"			
	S2-32x12-STN	S2-32x12-BD	12"			
36"	S2-36x2-STN	S2-36x2-BD	2"	41-3/8"	35-3/4"	33"
	S2-36x3-STN	S2-36x3-BD	3"			
	S2-36x4-STN	S2-36x4-BD	4"			
	S2-36x5-STN	S2-36x5-BD	5"			
	S2-36x6-STN	S2-36x6-BD	6"			
	S2-36x8-STN	S2-36x8-BD	8"			
	S2-36x10-STN	S2-36x10-BD	10"			
	S2-36x12-STN	S2-36x12-BD	12"			
38"	S2-38x2-STN	S2-38x2-BD	2"	43-3/8"	37-3/4"	35"
	S2-38x3-STN	S2-38x3-BD	3"			
	S2-38x4-STN	S2-38x4-BD	4"			
	S2-38x5-STN	S2-38x5-BD	5"			
	S2-38x6-STN	S2-38x6-BD	6"			
	S2-38x8-STN	S2-38x8-BD	8"			
	S2-38x10-STN	S2-38x10-BD	10"			
	S2-38x12-STN	S2-38x12-BD	12"			

LAY IN COVER

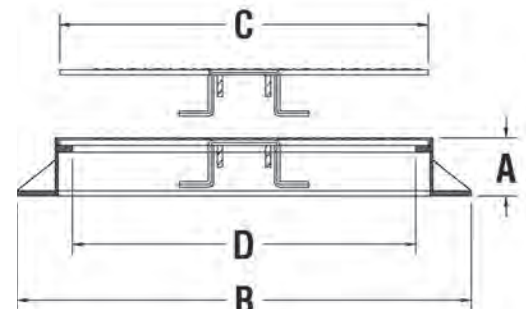

BOLT DOWN COVER

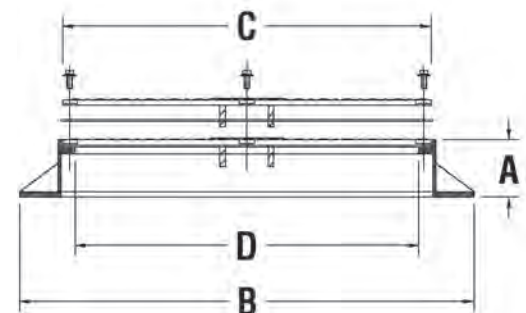


STEEL REPLACEMENT COVERS SQUARE

MEDIUM DUTY ASTM-A36 CARBON STEEL REPLACEMENT COVERS ARE ADA COMPLIANT WITH NON SKID SURFACE. IDEAL FOR GENERAL, LOW SPEED, LOW VOLUME TRAFFIC APPLICATIONS SUCH AS PARKING LOTS, GAS STATIONS, ETC. NOT FOR HIGHWAY USE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. PAINTED BLACK FINISH. MADE IN THE USA.



MEDIUM DUTY

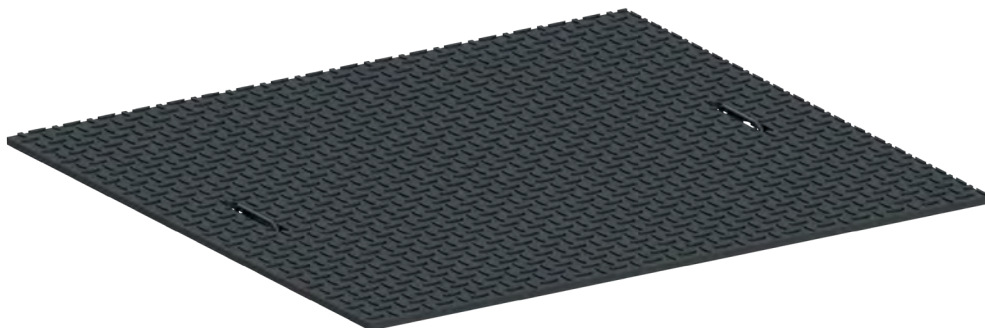

Choose from sizes to fit our standard manholes, or request a quote to accommodate your dimension and edge thickness. Every cover is custom made to your specification, and we look forward to helping you find a solution that works!

SIZE	MODEL	DIMENSIONS	THICKNESS	(1) 1/2" X 1" PICK HOLE	(2) ROUND BAR HANDLES
8"	MD-7.625X7.625X.375	7.625" x 7.625"	3/8"	✓	
12"	MD-11.625X11.625X.375	11.625" x 11.625"		✓	
18"	MD-17.625X17.625X.375	17.625" x 17.625"		✓	
20"	MD-19.625X19.625X.375	19.625" x 19.625"		✓	
24"	MD-23.625X23.625X.375	23.625" x 23.625"		✓	
30"	MD-29.625X29.625X.375	29.625" x 29.625"		✓	
32"	MD-31.5X31.5X.375	31.5" x 31.5"			✓
38"	MD-37.5X37.5X.375	37.5" x 37.5"	1/2"		✓
42"	MD-41.5X41.5X.5	41.5"			✓
48"	MD-47.5X47.5X.5	47.5"			✓



MANHOLE COVERS DIRECT
All Purpose Manhole Design & Fabrication

WE MAKE
THEM **QUICK**

WE MAKE
THEM **CUSTOM**

WE MAKE
THEM **FIT** NEW OR
EXISTING
SPACES


Drains

ROUND STEEL MANHOLES GRAVEL GUARD FRAME



INSTALLED VIEW

INTENDED FOR CONCRETE INSTALLATION

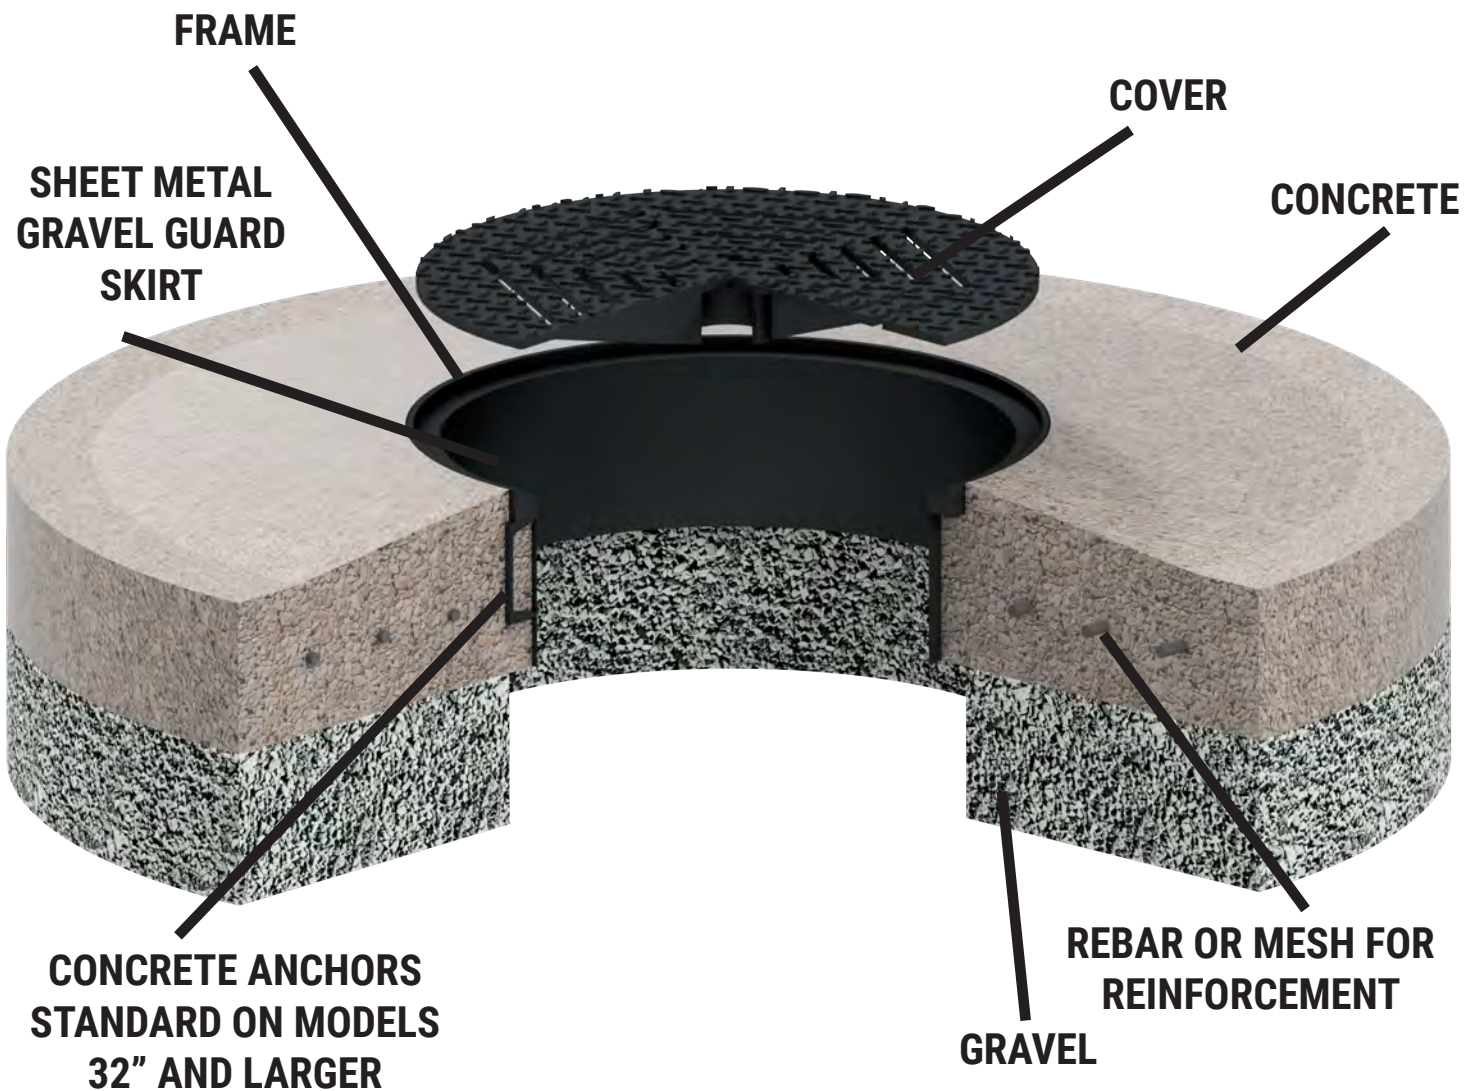


ROUND STEEL DRAIN MANHOLE GRAVEL GUARD FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL DRAIN MANHOLES DESIGNED TO BE INSTALLED IN CONCRETE APPLICATIONS. DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY T FRAME AND 14 GAUGE SKIRT, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVERS

1/2" Drain Slots, Gusset Reinforcements

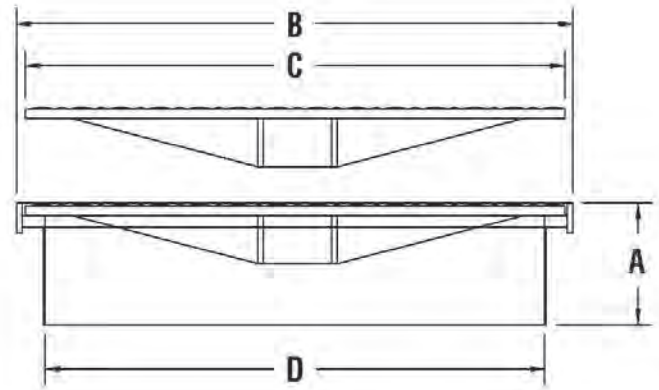

SIZE	MODEL	A	B	C	D
8"	R-8x4-DC	4-3/4"	9-3/16"	8-3/8"	5-3/4"
	R-8x6-DC	6-3/4"			
	R-8x8-DC	8-3/4"			
	R-8x12-DC	12-3/4"			
	R-8x18-DC	18-3/4"			
	R-8x24-DC	24-3/4"			
	R-8x36-DC	36-3/4"			
12"	R-12x4-DC	4-3/4"	13-1/8"	12-3/8"	9-1/2"
	R-12x6-DC	6-3/4"			
	R-12x8-DC	8-3/4"			
	R-12x12-DC	12-3/4"			
	R-12x18-DC	18-3/4"			
	R-12x24-DC	24-3/4"			
	R-12x36-DC	36-3/4"			
18"	R-18x4-DC	4-3/4"	18-3/4"	18"	15"
	R-18x6-DC	6-3/4"			
	R-18x8-DC	8-3/4"			
	R-18x12-DC	12-3/4"			
	R-18x18-DC	18-3/4"			
	R-18x24-DC	24-3/4"			
	R-18x36-DC	36-3/4"			
20"	R-20x4-DC	5"	20-1/2"	19-3/4"	18"
	R-20x6-DC	7"			
	R-20x8-DC	9"			
	R-20x12-DC	13"			
	R-20x18-DC	19"			
	R-20x24-DC	25"			
	R-20x36-DC	37"			


SIZE	MODEL	A	B	C	D
24"	R-24x4-DC	5"	24-1/2"	23-3/4"	22"
	R-24x6-DC	7"			
	R-24x8-DC	9"			
	R-24x12-DC	13"			
	R-24x18-DC	19"			
	R-24x24-DC	25"			
	R-24x36-DC	37"			
30"	R-30x4-DC	5"	30-1/2"	29-3/4"	28"
	R-30x6-DC	7"			
	R-30x8-DC	9"			
	R-30x12-DC	13"			
	R-30x18-DC	19"			
	R-30x24-DC	25"			
	R-30x36-DC	37"			
32"	R-32x4-DC	5"	32-1/2"	31-3/4"	30"
	R-32x6-DC	7"			
	R-32x8-DC	9"			
	R-32x12-DC	13"			
	R-32x18-DC	19"			
	R-32x24-DC	25"			
	R-32x36-DC	37"			
36"	R-36x4-DC	5"	36-1/2"	35-3/4"	34"
	R-36x6-DC	7"			
	R-36x8-DC	9"			
	R-36x12-DC	13"			
	R-36x18-DC	19"			
	R-36x24-DC	25"			
	R-36x36-DC	37"			

ROUND STEEL MANHOLES BASE FLANGE FRAME



INSTALLED VIEW

INTENDED FOR CONCRETE OR ASPHALT INSTALLATION

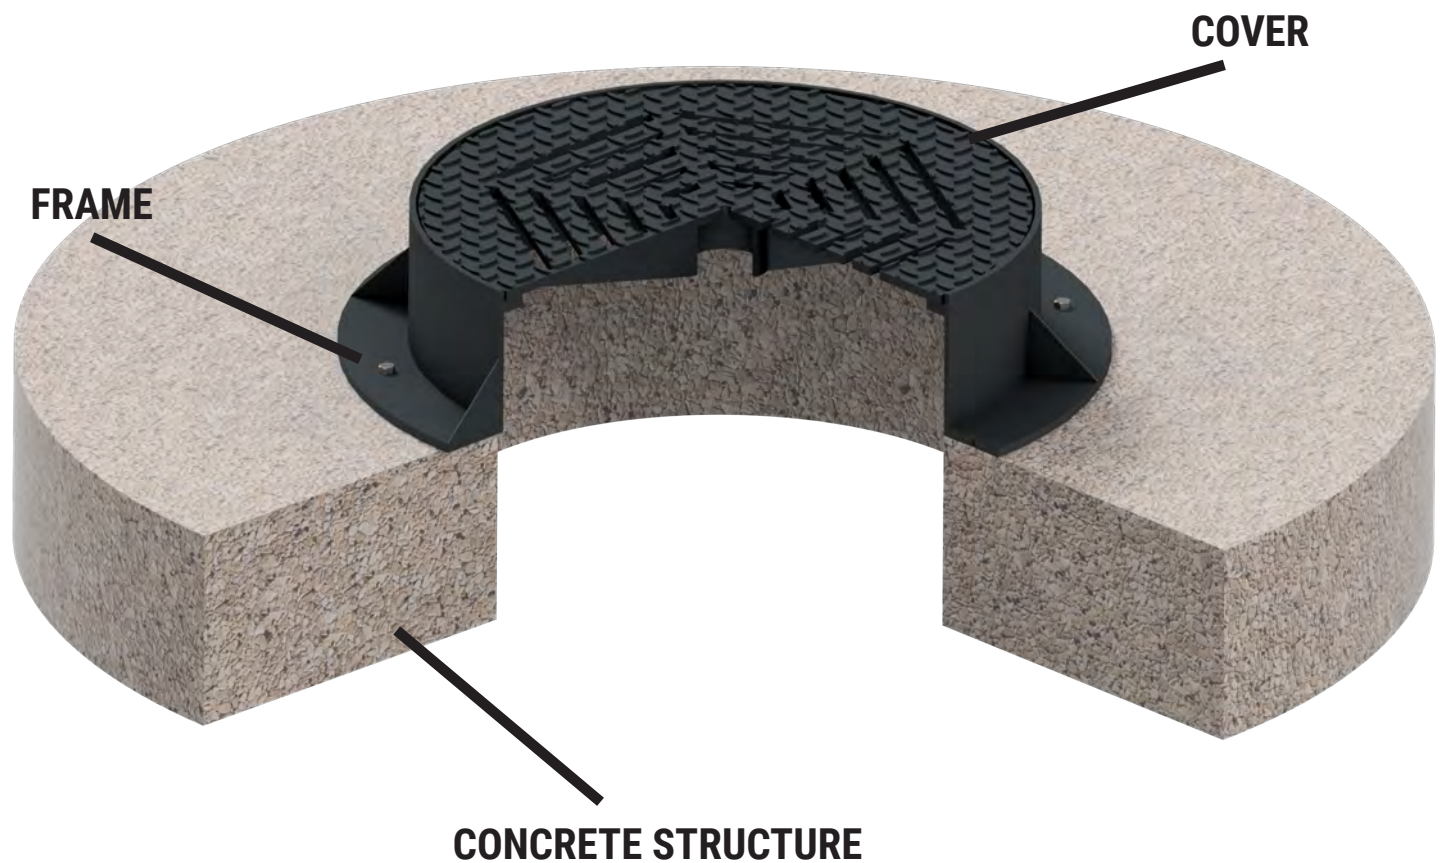


ROUND STEEL DRAIN MANHOLE BASE FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL DRAIN MANHOLES ARE INTENDED FOR CONCRETE, ASPHALT, GRASS OR DIRT INSTALLATION. DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN DRAIN COVERS

1/2" Drain Slots, Gusset Reinforcements

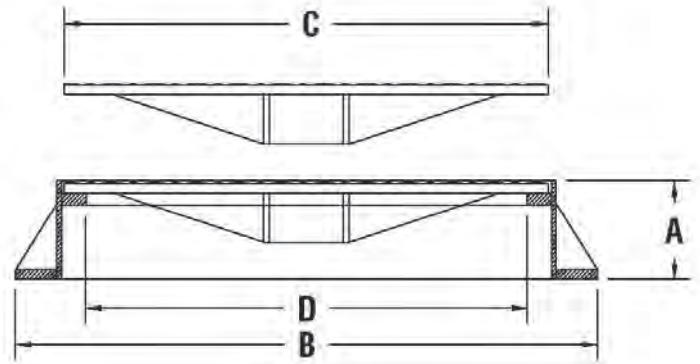

SIZE	MODEL	A	B	C	D
8"	R2-8x2-DC	2"	12"	8-3/8"	5-3/4"
	R2-8x3-DC	3"			
	R2-8x4-DC	4"			
	R2-8x5-DC	5"			
	R2-8x6-DC	6"			
	R2-8x8-DC	8"			
	R2-8x10-DC	10"			
	R2-8x12-DC	12"			
12"	R2-12x2-DC	2"	17"	12-3/8"	9-1/2"
	R2-12x3-DC	3"			
	R2-12x4-DC	4"			
	R2-12x5-DC	5"			
	R2-12x6-DC	6"			
	R2-12x8-DC	8"			
	R2-12x10-DC	10"			
	R2-12x12-DC	12"			
18"	R2-18x2-DC	2"	22-3/4"	18"	15"
	R2-18x3-DC	3"			
	R2-18x4-DC	4"			
	R2-18x5-DC	5"			
	R2-18x6-DC	6"			
	R2-18x8-DC	8"			
	R2-18x10-DC	10"			
	R2-18x12-DC	12"			
20"	R2-20x2-DC	2"	23-3/4"	19-3/4"	18"
	R2-20x3-DC	3"			
	R2-20x4-DC	4"			
	R2-20x5-DC	5"			
	R2-20x6-DC	6"			
	R2-20x8-DC	8"			
	R2-20x10-DC	10"			
	R2-20x12-DC	12"			

SIZE	MODEL	A	B	C	D
24"	R2-24x2-DC	2"	28-3/8"	23-3/4"	22"
	R2-24x3-DC	3"			
	R2-24x4-DC	4"			
	R2-24x5-DC	5"			
	R2-24x6-DC	6"			
	R2-24x8-DC	8"			
	R2-24x10-DC	10"			
	R2-24x12-DC	12"			
30"	R2-30x2-DC	2"	34-3/8"	29-3/4"	28"
	R2-30x3-DC	3"			
	R2-30x4-DC	4"			
	R2-30x5-DC	5"			
	R2-30x6-DC	6"			
	R2-30x8-DC	8"			
	R2-30x10-DC	10"			
	R2-30x12-DC	12"			
32"	R2-32x2-DC	2"	35-3/4"	31-3/4"	30"
	R2-32x3-DC	3"			
	R2-32x4-DC	4"			
	R2-32x5-DC	5"			
	R2-32x6-DC	6"			
	R2-32x8-DC	8"			
	R2-32x10-DC	10"			
	R2-32x12-DC	12"			
36"	R2-36x2-DC	2"	41-3/8"	35-3/4"	34"
	R2-36x3-DC	3"			
	R2-36x4-DC	4"			
	R2-36x5-DC	5"			
	R2-36x6-DC	6"			
	R2-36x8-DC	8"			
	R2-36x10-DC	10"			
	R2-36x12-DC	12"			

ROUND STEEL DRAIN MANHOLES TOP FLANGE FRAME



INSTALLED VIEW

INTENDED FOR CONCRETE INSTALLATION




ROUND STEEL DRAIN MANHOLES TOP FLANGE FRAME

ALL PURPOSE ASTM-A36 CARBON STEEL DRAIN MANHOLES ARE INTENDED FOR CONCRETE INSTALLATION. DIAMOND PLATE COVER WITH NON-SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY FLAT BAR FRAME, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



LAY IN COVER

1/2" Drain Slots, Gusset Reinforcements

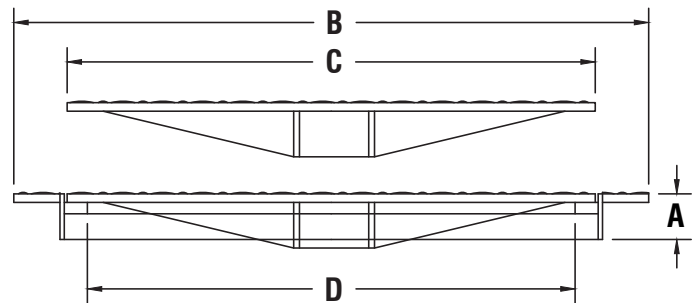

SIZE	MODEL	A	B	C	D
8"	R1-8x2-DC	2"	12"	8-3/8"	5-3/4"
	R1-8x3-DC	3"			
	R1-8x4-DC	4"			
12"	R1-12x2-DC	2"	17"	12-3/8"	9-1/2"
	R1-12x3-DC	3"			
	R1-12x4-DC	4"			
18"	R1-18x2-DC	2"	22-3/4"	18"	15"
	R1-18x3-DC	3"			
	R1-18x4-DC	4"			
20"	R1-20x2-DC	2"	23-3/4"	19-3/4"	18"
	R1-20x3-DC	3"			
	R1-20x4-DC	4"			

SIZE	MODEL	A	B	C	D
24"	R1-24x2-DC	2"	28-3/8"	23-3/4"	22"
	R1-24x3-DC	3"			
	R1-24x4-DC	4"			
30"	R1-30x2-DC	2"	34-3/8"	29-3/4"	28"
	R1-30x3-DC	3"			
	R1-30x4-DC	4"			
32"	R1-32x2-DC	2"	35-3/4"	31-3/4"	30"
	R1-32x3-DC	3"			
	R1-32x4-DC	4"			
36"	R1-36x2-DC	2"	41-3/8"	35-3/4"	34"
	R1-36x3-DC	3"			
	R1-36x4-DC	4"			



MANHOLE COVERS DIRECT
All Purpose Manhole Design & Fabrication

WE MAKE
THEM **QUICK**

WE MAKE
THEM **CUSTOM**

WE MAKE
THEM **FIT** NEW OR
EXISTING
SPACES

Custom Built Heavy Duty Manhole Covers and Drain Covers

STEEL REPLACEMENT COVERS HEAVY DUTY

HEAVY DUTY ASTM-A36 CARBON STEEL REPLACEMENT COVERS ARE ADA COMPLIANT WITH NON SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 35MPH. IDEAL FOR GENERAL, AVERAGE VOLUME TRAFFIC APPLICATIONS SUCH AS ENTRANCES TO PARKING LOTS, LOADING DOCKS, AREAS THAT EXPERIENCE HEAVY EQUIPMENT OR TRUCK TRAFFIC, ETC. NOT FOR HIGHWAY USE. PAINTED BLACK FINISH. MADE IN USA.




Every cover is custom-made to your specification, and we look forward to helping you find a solution that works! Choose your edge thickness and diameter to get started building your replacement cover:



CUSTOMIZED EDGE THICKNESS



TOP VIEW

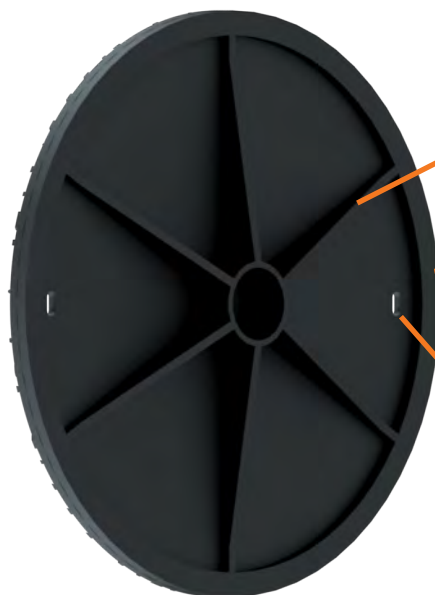


BOTTOM VIEW

3/8" THICK GUSSETS
STITCH WELDED
UNDERNEATH FOR
REINFORCEMENT
(6 TYP)

HOT ROLLED FLAT
BAR STITCH WELDED
UNDERNEATH FOR
CUSTOM EDGE
THICKNESS

1/2" X 1" PICK HOLE
FOR EASY REMOVAL
(2 TYP)

CUSTOMIZED DIAMETER

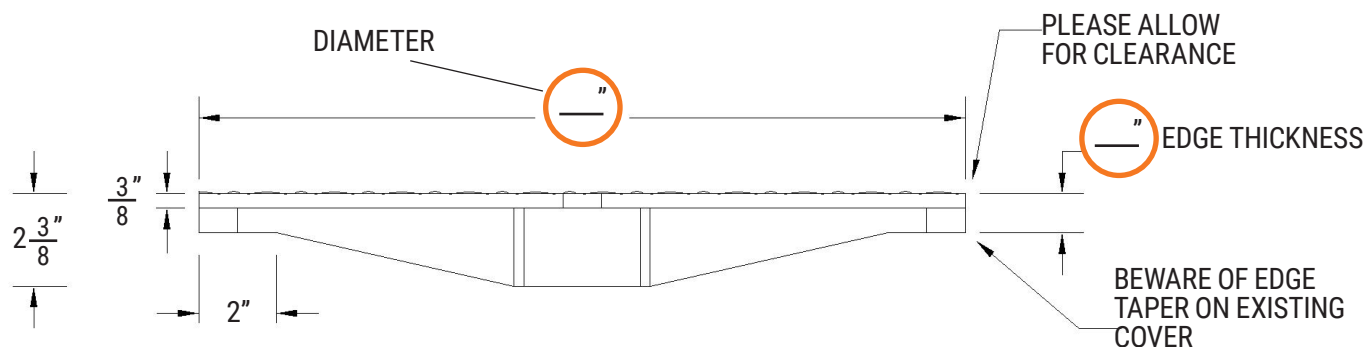

Visit www.manholecoversdirect.com for full list of sizes and pricing, or to request a quote for additional options.

STEEL REPLACEMENT DRAIN COVERS HEAVY DUTY


HEAVY DUTY ASTM-A36 CARBON STEEL REPLACEMENT DRAIN COVERS, NON SKID SURFACE, RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. IDEAL FOR GENERAL, AVERAGE VOLUME TRAFFIC APPLICATIONS SUCH AS ENTRANCES TO PARKING LOTS, LOADING DOCKS, AREAS THAT EXPERIENCE HEAVY EQUIPMENT OR TRUCK TRAFFIC, ETC. NOT FOR HIGHWAY USE. PAINTED BLACK FINISH. MADE IN USA.




Every drain cover is custom-made to your specification, and we look forward to helping you find a solution that works! Choose your edge thickness and diameter to get started building your replacement drain cover:



CUSTOMIZED EDGE THICKNESS

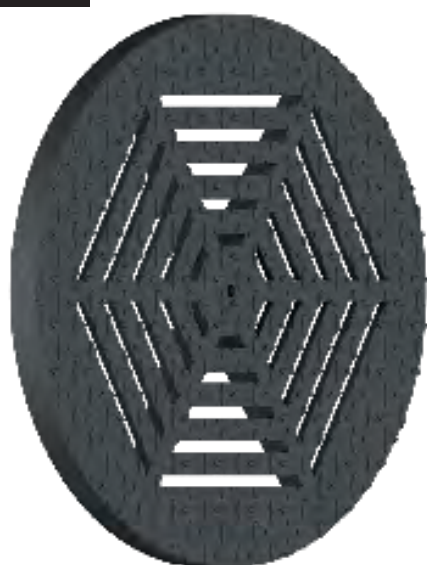

TOP VIEW

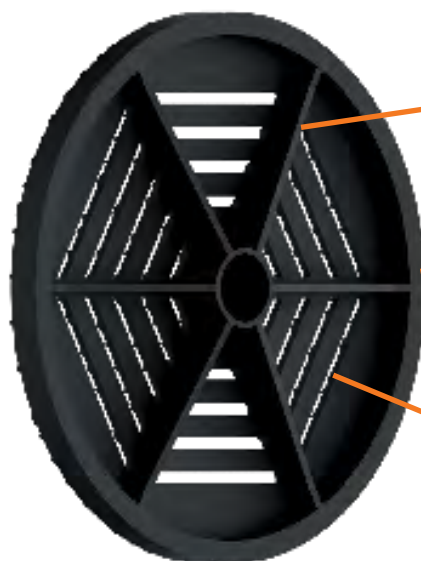


BOTTOM VIEW

3/8" THICK GUSSETS
STITCH WELDED
UNDERNEATH FOR
REINFORCEMENT
(6 TYP)

HOT ROLLED FLAT
BAR STITCH WELDED
UNDERNEATH FOR
CUSTOM EDGE
THICKNESS

1/2" DRAIN SLOTS,
EQUALLY PLACED

CUSTOMIZED DIAMETER

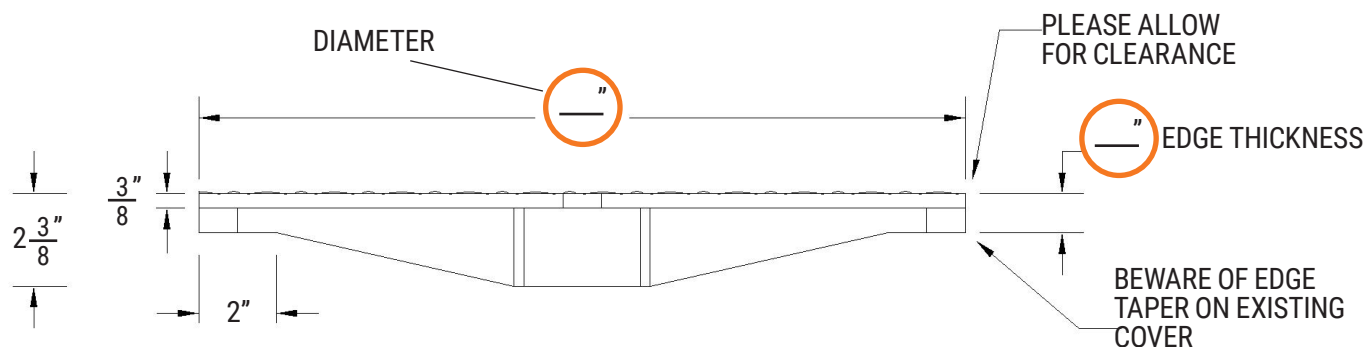

Visit www.manholecoversdirect.com for full list of sizes and pricing, or to request a quote for additional options.



MANHOLE COVERS DIRECT
All Purpose Manhole Design & Fabrication

WE MAKE
THEM **QUICK**

WE MAKE
THEM **CUSTOM**

WE MAKE
THEM **FIT** NEW OR
EXISTING
SPACES

Composite Manholes

COMPOSITE MANHOLES GRAVEL GUARD FRAME

ALL PURPOSE COMPOSITE ACCESS MANHOLES DESIGNED TO BE INSTALLED IN CONCRETE APPLICATIONS. ADA COMPLIANT NON SKID SURFACE COVERS ARE POLYESTER RESIN REINFORCED WITH FIBERGLASS. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. HEAVY DUTY T FRAME AND 14 GAUGE SKIRT, ALL WELDED CONSTRUCTION. PAINTED BLACK FINISH. MADE IN THE USA.



Covers are 1" thick and include (1) one stainless steel recessed handle for easy lifting.



LAY IN

Lay In Cover



BOLT DOWN

Bolt Down with 1/8" Buna-N Gasket, Stainless Steel Hardware




CAM LOCKING

Cam Locking with 1/8" Buna-N Gasket, (4) Cam Locks with I.D. Tag



SIZE	LAY IN MODEL	BOLT DOWN MODEL	CAM LOCKING MODEL	A	B	C	D
40"	F-40x4-STN	F-40x4-BD	F-40x4-CL	5-1/2"	40"	39-1/4"	37"
	F-40x6-STN	F-40x6-BD	F-40x6-CL	7-1/2"			
	F-40x8-STN	F-40x8-BD	F-40x8-CL	9-1/2"			
	F-40x12-STN	F-40x12-BD	F-40x12-CL	13-1/2"			
	F-40x18-STN	F-40x18-BD	F-40x18-CL	19-1/2"			
	F-40x24-STN	F-40x24-BD	F-40x24-CL	25-1/2"			
	F-40x36-STN	F-40x36-BD	F-40x36-CL	37-1/2"			
45"	F-45x4-STN	F-45x4-BD	F-45x4-CL	5-1/2"	45"	44-1/4"	42"
	F-45x6-STN	F-45x6-BD	F-45x6-CL	7-1/2"			
	F-45x8-STN	F-45x8-BD	F-45x8-CL	9-1/2"			
	F-45x12-STN	F-45x12-BD	F-45x12-CL	13-1/2"			
	F-45x18-STN	F-45x18-BD	F-45x18-CL	19-1/2"			
	F-45x24-STN	F-45x24-BD	F-45x24-CL	25-1/2"			
	F-45x36-STN	F-45x36-BD	F-45x36-CL	37-1/2"			

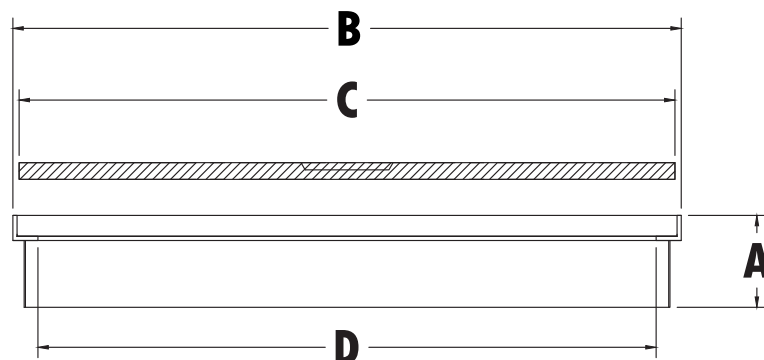

COMPOSITE MANHOLES



REPLACEMENT COMPOSITE COVERS ARE DESIGNED TO LAY INTO AN EXISTING FRAME. ADA COMPLIANT NON SKID SURFACE COVERS ARE POLYESTER RESIN REINFORCED WITH FIBERGLASS. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. MADE IN THE USA.



REPLACEMENT COVERS




A lightweight solution for heavy-duty traffic. Our closed mold injection systems produce durable and lightweight covers that are rated for H-20 wheel loading and designed to last!

Our covers are polyester resin reinforced with fiberglass, are 1" thick and include (1) one stainless steel recessed handle for easy lifting.

Choose from diameters of 39-1/4" or 44-1/4".

SIZE	MODEL	A	B
40"	F-39.25X1	39.25"	1"
45"	F-44.25X1	44.25"	1"

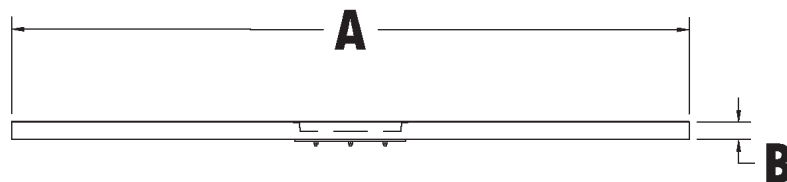



MANHOLE COVERS DIRECT
All Purpose Manhole Design & Fabrication

WE MAKE
THEM **QUICK**

WE MAKE
THEM **CUSTOM**

WE MAKE
THEM **FIT** NEW OR
EXISTING
SPACES

Drop-In Collar Covers

DROP-IN COLLAR COVERS HEAVY DUTY

ASTM-A36 CARBON STEEL DROP-IN COLLAR COVERS HAVE A NON SKID SURFACE. RATED FOR H-20 SINGLE POINT WHEEL LOADING FOR VEHICLE TRAFFIC UNDER 25MPH. LOW EFFORT FRAMELESS SOLUTION. 2" LIP ALLOWS FOR PROPER SUPPORT. 2" DEEP COLLAR TO HOLD COVER CENTER IN HOLE. NOT FOR HIGHWAY USE. PAINTED BLACK FINISH. MADE IN USA.



Every cover is custom-made to your specification, and we look forward to helping you find a solution that works! Keep in mind, the Drop In Collar style will have a lip, and will not be flush with grade unless you are able to create a recessed frame. Choose your collar dimensions to get started building your drop-in collar replacement cover:



CUSTOMIZED FEATURES

TOP VIEW



BOTTOM VIEW




1/2" ANCHOR HOLES
(3 TYP, OPTIONAL)

1/2" X 1" PICK HOLE
FOR EASY REMOVAL
(1 TYP, OPTIONAL)

3/16" X 2" FLAT BAR COLLAR
STITCH WELDED UNDERNEATH
TO HOLD COVER IN PLACE

CUSTOMIZED COLLAR DIAMETER

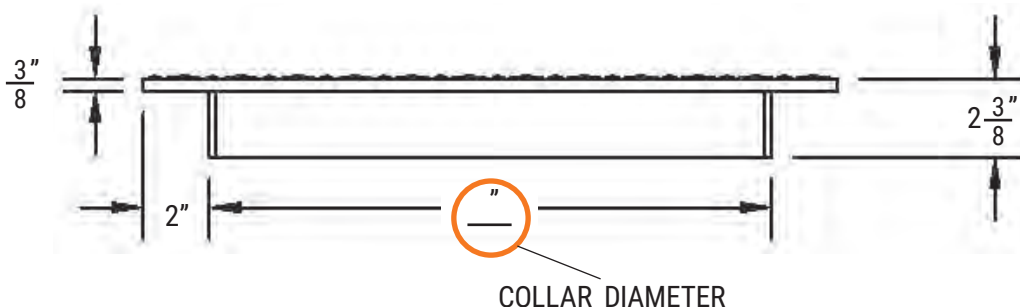

Visit www.manholecoversdirect.com for full list of sizes and pricing, or to request a quote for additional options.